



### **KEF is a proud pioneer of excellence in sound**

Since 1961, KEF has been obsessed with the power of high-fidelity; with its ability to shape and enhance the lives of listeners, and to transform the experience of sound from the ordinary to the visceral.

With innovation at our core and passion in our hearts, we are committed to engineering exceptional products and transformative experiences that bring meaning, magic, and moments into every home.

We continue to follow our founding vision to be the best at what we do, and to create a world in which listeners and creators can be inspired and supported to listen with intent and to believe with confidence.

*'Of all art, music is the most indefinable and the most expressive, the most insubstantial and the most immediate, the most transitory and the most imperishable. Transformed to a dance of electrons along a wire, its ghost lives on. When KEF returns music to its rightful habitation, your ears and mind, they aim to do so in the most natural way they can... without drama, without exaggeration, without artifice.'*

Raymond Cooke

*KEF founder*

# Index

---

<b>4</b>	<b>Listen and believe</b>	
<b>5</b>	<b>KEF Technologies</b>	
<b>6</b>	<b>HiFi Speakers &amp; Accessories</b>	
<b>8</b>		Muon
<b>10</b>		Blade
<b>12</b>		The Reference
<b>16</b>		R Series
<b>20</b>		Q Series
<b>26</b>		LS50 Meta
<b>28</b>		T Series
<b>32</b>	<b>Wireless HiFi Speakers &amp; Accessories</b>	
<b>34</b>		LS60 Wireless
<b>34</b>		LS50 Wireless II
<b>36</b>		LSX II
<b>36</b>		LSX II LT

---

---

<b>38</b>	<b>Headphones &amp; Accessories</b>	
<b>41</b>		Mu7
<b>41</b>		Mu3
<b>44</b>	<b>Subwoofers &amp; Accessories</b>	
<b>47</b>		Reference 8b
<b>47</b>		KC92
<b>48</b>		KC62
<b>48</b>		Kube 15 MIE
<b>48</b>		Kube 12 MIE
<b>48</b>		Kube 10 MIE
<b>49</b>		Kube 8 MIE
<b>49</b>		T2
<b>50</b>	<b>Architectural Speakers &amp; Accessories</b>	
<b>53</b>		Extreme Home Theatre
<b>56</b>		In-ceiling & in-wall
<b>61</b>		Special applications
<b>64</b>		Installed subwoofers
<b>66</b>		Outdoor

---


# Listen and believe

KEF's mission is to deliver sound with as little intervention as possible; from treble to bass, and everything in between.

We believe that the best sound is natural sound. Combining our obsessions with acoustic authenticity and innovative engineering, our products speak for themselves.

## KEF Technologies

A list of breakthroughs spanning more than half a century shores up that promise; a walk to match the talk. Patents and academic papers alike testify to decades of consistent progress, from the early use of synthetic materials to our Reference Series which determines industry standards to this day. KEF's insistence on excellence is at the heart of a virtuous circle, which attracts the world's most gifted acoustic engineers to join us in the pursuit of good, better, best.

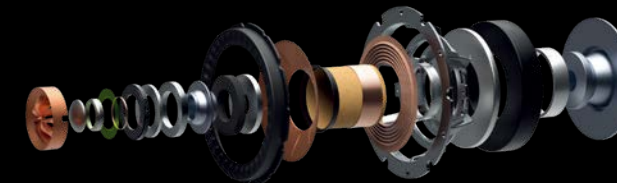


### Uni-Q® Technology

Of the many landmark innovations KEF has pioneered, arguably the greatest of all is the Uni-Q® driver array. Uni-Q® acts as a single point source to disperse sound more evenly, delivering a more coherent, hyper-realistic sound experience.




### Metamaterial Absorption Technology (MAT™)

Metamaterial Absorption Technology (MAT™) is a highly complex maze-like structure that absorbs 99% of the unwanted sound from the rear of the driver, eliminating the resulting distortion and providing purer, more natural sound.




### Single Apparent Source Technology

A unique technology that aims to achieve the acoustic ideal of a point source, where low, mid and high frequencies radiate from one point. The result is noticeably more precise imaging and highly accurate sound across a wider area.



### Uni-Core™ Technology

Uni-Core™ technology redefines the physical space high-performance speakers and subwoofers required to deliver deep and accurate bass. Through exceptional engineering and creativity, KEF's engineers have revolutionised the traditional force cancelling arrangement with a Uni-Core™ design that delivers deeper bass from ultra-compact cabinets.



### Music Integrity Engine® (MIE)

Music Integrity Engine is a collection of bespoke Digital Signal Processing algorithms that is optimised for the Uni-Q driver, enabling it to deliver a perfectly timed performance, for better imaging and a tighter sound.

# HiFi Speakers & Accessories



# Muon

Sound by KEF.  
Design by Ross Lovegrove.



The ultimate loudspeaker with state-of-the-art acoustic technology with the sensual, organic forms of the visionary industrial designer Ross Lovegrove. Muon is limited to an edition of 100 pairs.

- Key Features**
- Each Muon is individually crafted and comes with a certificate of its unique frequency response curve
  - Feature Uni-Q driver array to deliver seamless imaging throughout the room
  - Acoustic Compliance Enhancement (ACE) technology to double the available volume through adsorption
  - Constructed from 6mm, super-formed aluminium to provide a totally rigid structure that minimises sound-distorting vibrations

- Key Technologies**
- Uni-Q®
  - Acoustic Compliance Enhancement (ACE)

## Muon

A triumph of form marrying function, Muon is perhaps the most extraordinary loudspeaker ever conceived.



MSRP  
**€100,000 /piece**

### PRODUCT SPECIFICATION

<b>Design</b>	Four-way closed box floorstanding loudspeaker ACE enclosure
<b>Drive units</b>	6 x 250 mm (10 in.) LF 1 x 250 mm (10 in.) LMF <b>Uni-Q driver array</b> MF 1 x 125 mm (5 in.) L-Mg-Al/LCP hybrid cone HF 1 x 25 mm (1 in.) vented aluminium dome, featuring KEF's unique 'Tangerine Waveguide'
<b>Frequency response</b>	4 Ω (min. 3.2 Ω)
<b>Amplifier requirements</b>	100 to 400 W (typical)
<b>Sensitivity</b>	90 dB (2.83V/1m)
<b>Maximum output</b>	118 dB
<b>Impedance</b>	4 Ω (min. 3.2 Ω)

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H2160 x W850 x D700 mm (85 x 33.5 x 27.6 in./piece)
<b>Gross weight</b>	180 kg (396.9 lbs./piece)
<b>Warranty period</b>	5 years
<b>Finishes</b>	Polished Aluminium
<b>Item no.</b>	SP3582AA
<b>UPC</b>	637203027727





# Blade

A sound statement.  
An icon that engages every sense.



A bold and striking presence, Blade pushes the boundaries of what is possible with sound. The world's first Single Apparent Source loudspeaker now with Metamaterial Absorption Technology (MAT™).

- Key Features**
- Single Apparent Source technology revolutionises the orientation of the low, mid, and high frequency drivers to deliver sound you hear to be more real and immersive
  - Metamaterial Absorption Technology eliminates 99% of high-frequency distortion for pure, natural sound
  - Bespoke 12<sup>th</sup> generation Uni-Q with MAT driver array for exceptional acoustic accuracy
  - Two pairs of force-cancelling LF drivers deliver clean, massively extended bass
  - Enhanced crossover design fine-tuned the signal path for maximum clarity
  - Optimised cabinet design for best acoustic performance
  - Customised finishes are available upon request

- Key Technologies**
- Uni-Q®
  - MAT™
  - Single Apparent Source Technology

## Blade One Meta


Blade One Meta is the top model of Blade, the pinnacle of KEF engineering.



MSRP  
**€17,500/piece**

### PRODUCT SPECIFICATION

<b>Design</b>	Three-way bass reflex Single apparent source
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 4 x 225 mm (9 in.) aluminium cone, force cancelling
<b>Frequency response</b>	35 Hz - 35 kHz
<b>Amplifier requirements</b>	50 - 400 W
<b>Sensitivity</b>	88 dB
<b>Maximum output</b>	117 dB
<b>Impedance</b>	4 Ω (min. 2.8 Ω)
<b>Dimensions</b>	H1590 x W363 x D540 mm (62.5 x 14.3 x 21.2 in./piece)
<b>Product weight</b>	57.2 kg (126 lbs./piece)



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H1680 x W454 x D704 mm (66.1 x 17.8 x 27.7 in./piece)		
<b>Gross weight</b>	68.1 kg (150.1 lbs./piece)		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Piano Black/Grey	b. Piano Black/Copper	c. Frosted Blue/Blue
<b>Item no.</b>	SP4044BA	SP4044ZA01	SP4044CA
<b>UPC</b>	637203048371	637203048418	637203048388
<b>Finishes</b>	d. Frosted Blue/Bronze	e. Charcoal Grey/Red	f. Charcoal Grey/Bronze
<b>Item no.</b>	SP4044ZA03	SP4044ZA02	SP4044HA
<b>UPC</b>	637203048432	637203048425	637203048395
<b>Finishes</b>	g. Racing Red/Grey	h. Arctic White/Champagne	
<b>Item no.</b>	SP4044KA	SP4044AA	
<b>UPC</b>	637203048401	637203048364	

## Blade Two Meta


Blade Two Meta shares the same Blade DNA in a smaller footprint.



MSRP  
**€13,000/piece**

### PRODUCT SPECIFICATION

<b>Design</b>	Three-way bass reflex Single apparent source
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 4 x 165 mm (6.5 in.) aluminium cone, force cancelling
<b>Frequency response</b>	33 Hz - 35 kHz
<b>Amplifier requirements</b>	50 - 400 W
<b>Sensitivity</b>	86 dB
<b>Maximum output</b>	116 dB
<b>Impedance</b>	4 Ω (min. 3.2 Ω)
<b>Dimensions</b>	H1461 x W338 x D475 mm (57.5 x 13.3 x 18.7 in./piece)
<b>Product weight</b>	35.5 kg (77.8 lbs./piece)



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H1566 x W454 x D622 mm (61.7 x 17.9 x 24.5 in./piece)		
<b>Gross weight</b>	44.6 kg (98.3 lbs./piece)		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Piano Black/Grey	b. Piano Black/Copper	c. Frosted Blue/Blue
<b>Item no.</b>	SP4045BA	SP4045ZA01	SP4045CA
<b>UPC</b>	637203048456	637203048494	637203048463
<b>Finishes</b>	d. Frosted Blue/Bronze	e. Charcoal Grey/Red	f. Charcoal Grey/Bronze
<b>Item no.</b>	SP4044ZA03	SP4045ZA02	SP4045HA
<b>UPC</b>	637203048517	637203048500	637203048470
<b>Finishes</b>	g. Racing Red/Grey	h. Arctic White/Champagne	
<b>Item no.</b>	SP4045KA	SP4045AA	
<b>UPC</b>	637203048487	637203048449	





# The Reference

Detail remastered.  
An icon redefined for tomorrow.



The essential for any audiophile. Hand built by the masters who set the standard for audio quality, THE REFERENCE has been the benchmark for loudspeakers and sound reproduction. The Reference is an embodiment of KEF's philosophy and the relentless pursuit of perfection. Now with Metamaterial Absorption Technology (MAT™).

- Key Features**
- Metamaterial Absorption Technology eliminates 99% of high-frequency distortion for pure, natural sound
  - Bespoke 12<sup>th</sup> generation Uni-Q with MAT driver array for exceptional acoustic accuracy
  - Enhanced crossover design fine-tuned the signal path for maximum clarity
  - Optimised cabinet design for best acoustic performance
  - With mounting inserts to secure on KEF S-RF1 Floor Stand (available as separate item)
  - The Reference Series Grille set for each model is available as separate item


- Key Technologies**
- Uni-Q®
  - MAT™

## Reference 5 Meta

The flagship model that all other high-performance loudspeakers compare themselves against.



<b>MSRP</b>	<b>€10,000/piece</b>		
<b>PRODUCT SPECIFICATION</b>			
<b>Design</b>	Three-way bass reflex		
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 165 mm (6.5 in.) aluminium cone		
<b>Frequency response</b>	40 Hz – 35 kHz (±3 dB)		
<b>Amplifier requirements</b>	50 - 400 W		
<b>Sensitivity</b>	88 dB		
<b>Maximum output</b>	116 dB		
<b>Impedance</b>	4Ω (min. 3.2Ω)		
<b>Dimensions</b>	H1350 x W205 x H462 mm (53.1 x 8.1 x 18.2 in./piece)		
<b>Product weight</b>	60.2 kg (132.7 lbs./piece)		




<b>LOGISTIC SPECIFICATION</b>			
<b>Packaging dimensions</b>	H1555 x W598 x D354 mm (61.2 x 23.5 x 13.9 in./piece)		
<b>Gross weight</b>	63.9 kg (140.9 lbs./piece)		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. High-gloss white/ Champagne	b. High-gloss white/ Blue	c. High-gloss black/ Grey
<b>Item no.</b>	SP4050AA	SP4050CA	SP4050BA
<b>UPC</b>	637203048685	637203048708	637203048692
<b>Finishes</b>	d. High-gloss black/ Copper	e. Satin Walnut/ Silver	
<b>Item no.</b>	SP4050EA	SP4050WA	
<b>UPC</b>	637203048715	637203048722	

## Reference 3 Meta

The floorstanding model that is capable of delivering a sensational sound stage.



<b>MSRP</b>	<b>€6,750/piece</b>		
<b>PRODUCT SPECIFICATION</b>			
<b>Design</b>	Three-way bass reflex		
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 2 x 165 mm (6.5 in.) aluminium cone		
<b>Frequency response</b>	43 Hz – 35 kHz (±3 dB)		
<b>Amplifier requirements</b>	50 - 300 W		
<b>Sensitivity</b>	86 dB		
<b>Maximum output</b>	113.5 dB		
<b>Impedance</b>	4Ω (min. 3.2Ω)		
<b>Dimensions</b>	H1155 x W205 x D462 mm (45.5 x 8.1 x 18.2 in./piece)		
<b>Product weight</b>	51.3 kg (113.1 lbs./piece)		



<b>LOGISTIC SPECIFICATION</b>			
<b>Packaging dimensions</b>	H1360 x W598 x D354 mm (53.5 x 23.5 x 18.2 in./piece)		
<b>Gross weight</b>	59.7 kg (131.6 lbs./piece)		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. High-gloss white/ Champagne	b. High-gloss white/ Blue	c. High-gloss black/ Grey
<b>Item no.</b>	SP4049AA	SP4049CA	SP4050BA
<b>UPC</b>	637203048630	637203048654	637203048647
<b>Finishes</b>	d. High-gloss black/ Copper	e. Satin Walnut/ Silver	
<b>Item no.</b>	SP4049EA	SP4049WA	
<b>UPC</b>	637203048661	637203048678	

## Reference 1 Meta


The compact standmount model that delivers expansive, high-performance sound beyond what its size suggests.



MSRP  
€4,500/piece

### PRODUCT SPECIFICATION

<b>Design</b>	Three-way bass reflex
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 165 mm (6.5 in.) aluminium cone
<b>Frequency response</b>	45 Hz – 35 kHz (±3 dB)
<b>Amplifier requirements</b>	50 - 200 W
<b>Sensitivity</b>	85 dB
<b>Maximum output</b>	111 dB
<b>Impedance</b>	4 Ω (min. 3.2 Ω)
<b>Dimensions</b>	H440 x W205 x D422 mm (17.3 x 8.1 x 16.6 in.)/piece
<b>Product weight</b>	18.2 kg (40.1 lbs.)/piece



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H585 x W598 x D354 mm (23 x 23.5 x 13.9 in.)/piece		
<b>Gross weight</b>	22.8 kg (50.3 lbs.)/piece		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. High-gloss white/ Champagne	b. High-gloss white/ Blue	c. High-gloss black/ Grey
<b>Item no.</b>	SP4048AA	SP4048CA	SP4048BA
<b>UPC</b>	637203048586	637203048609	637203048593
<b>Finishes</b>	d. High-gloss black/ Copper	e. Satin Walnut/ Silver	
<b>Item no.</b>	SP4048EA	SP4048WA	
<b>UPC</b>	637203048616	637203048623	

## Reference 4 Meta


The flagship centre speaker for movie lovers looking for total immersion.



MSRP  
€7,500/piece

### PRODUCT SPECIFICATION

<b>Design</b>	Three-way bass reflex
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 4 x 165 mm (6.5 in.) aluminium cone
<b>Frequency response</b>	48 Hz – 35 kHz (±3 dB)
<b>Amplifier requirements</b>	50 - 400 W
<b>Sensitivity</b>	88 dB
<b>Maximum output</b>	116 dB
<b>Impedance</b>	4 Ω (min. 3.2 Ω)
<b>Dimensions</b>	H205 x W1090 x D463 mm (8.1 x 42.9 x 18.2 in.)/piece
<b>Product weight</b>	45.2 kg (99.6 lbs.)/piece



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H1333 x W598 x D354 mm (52.5 x 23.5 x 13.9 in.)/piece		
<b>Gross weight</b>	53.8 kg (118.6 lbs.)/piece		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. High-gloss white/ Champagne	b. High-gloss white/ Blue	c. High-gloss black/ Grey
<b>Item no.</b>	SP4052AA	SP4052CA	SP4052BA
<b>UPC</b>	637203048784	637203048807	637203048791
<b>Finishes</b>	d. High-gloss black/ Copper	e. Satin Walnut/ Silver	
<b>Item no.</b>	SP4052EA	SP4052WA	
<b>UPC</b>	637203048814	637203048821	



## Reference 2 Meta


The centre speaker designed for people with smaller rooms but demand high-performance sound.



MSRP  
€4,500/piece

### PRODUCT SPECIFICATION


<b>Design</b>	Three-way closed box
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 2 x 165 mm (6.5 in.) aluminium cone
<b>Frequency response</b>	80 Hz – 35 kHz (±3 dB)
<b>Amplifier requirements</b>	50 - 300 W
<b>Sensitivity</b>	86 dB
<b>Maximum output</b>	113.5 dB
<b>Impedance</b>	4 Ω (min. 3.2 Ω)
<b>Dimensions</b>	H205 x W630 x D335 mm (8.1 x 24.8 x 13.2 in.)/piece
<b>Product weight</b>	22.8 kg (50.3 lbs.)/piece



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H760 x W598 x D354 mm (29.9 x 23.5 x 13.9 in.)/piece		
<b>Gross weight</b>	28.4 kg (62.6 lbs.)/piece		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. High-gloss white/ Champagne	b. High-gloss white/ Blue	c. High-gloss black/ Grey
<b>Item no.</b>	SP4048AA	SP4051CA	SP4051BA
<b>UPC</b>	637203048586	637203048753	637203048746
<b>Finishes</b>	d. High-gloss black/ Copper	e. Satin Walnut/ Silver	
<b>Item no.</b>	SP4051EA	SP4051WA	
<b>UPC</b>	637203048760	637203048777	

## Reference 5 Grille Pack



MSRP  
€300/pair set

### PRODUCT SPECIFICATION

<b>Package</b>	Uni-Q grille: 2 pcs LF grille: 8 pcs
----------------	---

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H223 x W422 x D137 mm (8.8 x 16.6 x 5.4 in.)/set
<b>Gross weight</b>	1.28 kg (2.8 lbs.)/set
<b>Warranty period</b>	2 years
<b>Item no.</b>	SP3882AA
<b>UPC</b>	637203042324

## Reference 4c Grille Pack



MSRP  
€180/set

### PRODUCT SPECIFICATION

<b>Package</b>	Uni-Q grille: 1 pc LF grille: 4 pcs
----------------	--

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H223 x W422 x D72 mm (8.8 x 16.6 x 2.8 in.)/set
<b>Gross weight</b>	0.7 kg (1.5 lbs.)/set
<b>Warranty period</b>	2 years
<b>Item no.</b>	SP3883AA
<b>UPC</b>	637203042331

## Reference 3 Grille Pack



MSRP  
€250/pair set

### PRODUCT SPECIFICATION

<b>Package</b>	Uni-Q grille: 2 pcs LF grille: 4 pcs
----------------	---

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H223 x W422 x D72 mm (8.8 x 16.6 x 2.8 in.)/set
<b>Gross weight</b>	0.73 kg (1.6 lbs.)/set
<b>Warranty period</b>	2 years
<b>Item no.</b>	SP3881AA
<b>UPC</b>	637203042317

## Reference 1 Grille Pack



MSRP  
€130/pair set

### PRODUCT SPECIFICATION

<b>Package</b>	Uni-Q grille: 2 pcs LF grille: 2 pcs
----------------	---

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H223 x W422 x D47 mm (8.8 x 16.6 x 1.9 in.)/set
<b>Gross weight</b>	0.5 kg (1.1 lbs.)/set
<b>Warranty period</b>	2 years
<b>Item no.</b>	SP3880AA
<b>UPC</b>	637203042300

## Reference 2c Grille Pack



MSRP  
€100/set

### PRODUCT SPECIFICATION

<b>Package</b>	Uni-Q grille: 1 pc LF grille: 2 pcs
----------------	--

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H223 x W422 x D47 mm (8.8 x 16.6 x 1.9 in.)/set
<b>Gross weight</b>	0.46 kg (1 lbs.)/set
<b>Warranty period</b>	2 years
<b>Item no.</b>	SP3887AA
<b>UPC</b>	637203042348

## S-RF1 Floor Stand



MSRP  
€600/piece

### PRODUCT SPECIFICATION

<b>Dimensions</b>	H542 x W260 x D387 mm (21.4 x 10.2 x 15.2 in.)/stand	
<b>Product weight</b>	7.95 kg (17.5 lbs.)/stand	
<b>Compatible models</b>	Reference 1 meta	

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H229 x W730 x D600 mm (8.7 x 28.7 x 23.6 in.)/set	
<b>Gross weight</b>	19.9 kg (43.9 lbs.)/set	
<b>Warranty period</b>	2 years	
<b>Finishes</b>	a. Carbon Black	b. Mineral White
<b>Item no.</b>	SP4061BA	SP4061AA
<b>UPC</b>	637203048999	637203049002





## R Series

Performance redefined.  
An icon born from The Reference.



Developed for KEF's flagship The Reference, a suite of the latest technologies has now made its way into the new generation of the R Series. Whether in stereo for music or in a home theatre set up the R Series makes exceptional acoustic performance more accessible. Now with the groundbreaking Metamaterial Absorption Technology, the R Series reveals exquisite detail and incredible insight: truly an experience to savour.

### Key Features

- Metamaterial Absorption Technology (MAT™) eliminates 99% of high-frequency distortion for pure, natural sound
- Bespoke 12<sup>th</sup> generation Uni-Q with MAT driver array for exceptional acoustic accuracy
- Refined tweeter gap damper tames resonances for improved detail
- Flexible Decoupling Chassis prevents unwanted vibrations for better clarity
- Enhanced crossover design fine-tuned the signal path for pristine, clean sound
- Microfibre grilles offer the perfect balance between driver protection, sonic performance and aesthetics

### Key Technologies

- Uni-Q®
- MAT™

### R11 Meta


Flagship three-way floorstanding speakers



MSRP  
**€3,250/piece**

#### PRODUCT SPECIFICATION

<b>Design</b>	Three-way bass reflex
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 4 x 165 mm (6.5 in.) hybrid aluminium cone
<b>Frequency response</b>	46 Hz - 28 kHz (±3 dB)
<b>Amplifier requirements</b>	15 - 300 W
<b>Sensitivity</b>	90 dB
<b>Maximum output</b>	113 dB
<b>Impedance</b>	4 Ω (min. 3.2 Ω)
<b>Dimensions</b>	H1296 x W311 x D384 mm (51.0 x 12.2 x 15.1 in./piece)
<b>Product weight</b>	36.5 kg (80.5 lbs./piece)



#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H1447 x W512 x D346 mm (57 x 20.2 x 13.6 in./piece)		
<b>Gross weight</b>	43.5 kg (95.9 lbs./piece)		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Black Gloss	b. White Gloss	c. Walnut
<b>Item no.</b>	SP4056B1AA	SP4056A1AA	SP4056W0AA
<b>UPC</b>	637203049774	637203049781	637203049798

### R7 Meta

Mid-sized three-way floorstanding speakers



MSRP  
**€2,500/piece**

#### PRODUCT SPECIFICATION

<b>Design</b>	Three-way bass reflex
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 2 x 165 mm (6.5 in.) hybrid aluminium cone
<b>Frequency response</b>	48 Hz - 28 kHz (±3 dB)
<b>Amplifier requirements</b>	15 - 250 W
<b>Sensitivity</b>	88 dB
<b>Maximum output</b>	111 dB
<b>Impedance</b>	4 Ω (min. 3.2 Ω)
<b>Dimensions</b>	H1109 x W311 x D384 mm (43.7 x 12.2 x 15.1 in./piece)
<b>Product weight</b>	29.3 kg (64.6 lbs./piece)



#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H1261 x W512 x D346 mm (49.6 x 20.2 x 13.6 in./piece)		
<b>Gross weight</b>	35.8 kg (78.9 lbs./piece)		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Black Gloss	b. White Gloss	c. Walnut
<b>Item no.</b>	SP4055B1AA	SP4055A1AA	SP4055W0AA
<b>UPC</b>	637203049736	637203049743	637203049750
<b>Finishes</b>	d. Titanium Gloss Special Edition		
<b>Item no.</b>	SP4055H1AA		
<b>UPC</b>	637203049767		

## R5 Meta


Compact three-way floorstanding speakers



MSRP  
**€1,750/piece**

### PRODUCT SPECIFICATION

<b>Design</b>	Three-way bass reflex
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 2 x 130 mm (5.25 in.) hybrid aluminium cone
<b>Frequency response</b>	52 Hz - 28 kHz (±3 dB)
<b>Amplifier requirements</b>	15 - 200 W
<b>Sensitivity</b>	87 dB
<b>Maximum output</b>	110 dB
<b>Impedance</b>	4 Ω (min. 3.2 Ω)
<b>Dimensions</b>	H1072 x W272 x D344 mm (42.2 x 10.7 x 13.5 in.)/piece
<b>Product weight</b>	24.5 kg (54 lbs.)/piece



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H1223 x W472 x D321 mm (48.1 x 18.6 x 12.6 in.)/piece		
<b>Gross weight</b>	31.4 kg (69.2 lbs.)/piece		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Black Gloss	b. White Gloss	c. Walnut
<b>Item no.</b>	SP4054B1AA	SP4054A1AA	SP4054W0AA
<b>UPC</b>	637203049705	637203049712	637203049729

## R3 Meta


Three-way bookshelf speaker



MSRP  
**€1,100/piece**

### PRODUCT SPECIFICATION

<b>Design</b>	Three-way bass reflex
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 165 mm (6.5 in.) hybrid aluminium cone
<b>Frequency response</b>	58 Hz - 28 kHz (±3 dB)
<b>Amplifier requirements</b>	15 - 180 W
<b>Sensitivity</b>	87 dB
<b>Maximum output</b>	110 dB
<b>Impedance</b>	4 Ω (min. 3.2 Ω)
<b>Dimensions</b>	H422 x W200 x D336 mm (16.6 x 7.9 x 13.2 in.)/piece
<b>Product weight</b>	12.4 kg (27.3 lbs.)/piece



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H1261 x W512 x D346 mm (49.6 x 20.2 x 13.6 in.)/pair		
<b>Gross weight</b>	35.8 kg (78.9 lbs.)/pair		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Black Gloss	b. White Gloss	c. Walnut
<b>Item no.</b>	SP4053B1AA	SP4053A1AA	SP4053W0AA
<b>UPC</b>	637203049668	637203049675	637203049682
<b>Finishes</b>	d. Indigo Gloss Special Edition		
<b>Item no.</b>	SP4053C1AA		
<b>UPC</b>	637203049699		



## R6 Meta


Flagship three-way centre channel speaker



MSRP  
**€1,800/piece**

### PRODUCT SPECIFICATION

<b>Design</b>	Three-way closed box
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 2 x 165 mm (6.5 in.) hybrid aluminium cone
<b>Frequency response</b>	65 Hz - 28 kHz (±3 dB)
<b>Amplifier requirements</b>	15 - 250 W
<b>Sensitivity</b>	88 dB
<b>Maximum output</b>	111 dB
<b>Impedance</b>	4 Ω (min. 3.2 Ω)
<b>Dimensions</b>	H200 x W625 x D339 mm (7.9 x 24.6 x 13.3 in.)/piece
<b>Product weight</b>	17.8 kg (39.2 lbs.)/piece



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H336 x W769 x D456 mm (13.2 x 30.3 x 18 in.)/piece		
<b>Gross weight</b>	21.4 kg (47.2 lbs.)/piece		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Black Gloss	b. White Gloss	c. Walnut
<b>Item no.</b>	SP4058B1AA	SP4058A1AA	SP4058W0AA
<b>UPC</b>	637203049835	637203049842	637203049859

## R2 Meta


Compact three-way centre channel speaker



MSRP  
**€1,400/piece**

### PRODUCT SPECIFICATION

<b>Design</b>	Three-way closed box
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5 in.) aluminium cone <b>Bass units</b> LF: 2 x 130 mm (5.25 in.) hybrid aluminium cone
<b>Frequency response</b>	67 Hz - 28 kHz (±3 dB)
<b>Amplifier requirements</b>	15 - 200 W
<b>Sensitivity</b>	87 dB
<b>Maximum output</b>	110 dB
<b>Impedance</b>	4 Ω (min. 3.2 Ω)
<b>Dimensions</b>	H175 x W550 x D309 mm (6.9 x 21.7 x 12.2 in.)/piece
<b>Product weight</b>	15.4 kg (34.0 lbs.)/piece



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H311 x W682 x D432 mm (12.2 x 26.9 x 17 in.)/piece		
<b>Gross weight</b>	18.1 kg (40 lbs.)/piece		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Black Gloss	b. White Gloss	c. Walnut
<b>Item no.</b>	SP4057B1AA	SP4057A1AA	SP4057W0AA
<b>UPC</b>	637203049804	637203049811	637203049828

## R8 Meta


Dolby Atmos surround speakers



MSRP  
**€800/piece**

### PRODUCT SPECIFICATION

<b>Design</b>	Two-way closed box
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 5 mm (1 in.) vented aluminium dome with MAT MF / LF: 130 mm (5.25 in.) aluminium cone
<b>Frequency response</b>	97 Hz - 17.5 kHz (±3 dB)
<b>Amplifier requirements</b>	25 - 150 W
<b>Sensitivity</b>	85 dB
<b>Maximum output</b>	106 dB
<b>Impedance</b>	4 Ω (min. 3.2 Ω)
<b>Dimensions</b>	H174 x W175 x D259 mm (6.9 x 6.9 x 10.2 in.)/piece
<b>Product weight</b>	4.5 kg (9.9 lbs.)/piece



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H301 x W467 x D388 mm (11.9 x 18.4 x 15.3 in.)/pair		
<b>Gross weight</b>	11.4 kg (25.1 lbs.)/pair		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Black Gloss	b. White Gloss	c. Walnut
<b>Item no.</b>	SP4059BA	SP4059AA	SP4059WA
<b>UPC</b>	637203218620	637203218637	637203218736

## Accessories

### S3 Floor Stand

Speaker stand for R3 Meta



MSRP  
**€699/pair**

### PRODUCT SPECIFICATION

<b>Dimensions</b>	H542 x W260 x D387 mm (21.4 x 10.2 x 15.2 in.)/stand
<b>Product weight</b>	6.7 kg (14.7 lbs.)/stand



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H205 x W730 x D600 mm (8.1 x 28.7 x 23.6 in.)/pair		
<b>Gross weight</b>	17.4 kg (38.4 lbs.)/pair		
<b>Warranty period</b>	2 years		
<b>Finishes</b>	a. Slate Grey	b. Mineral White	c. Indigo Matte Special Edition
<b>Item no.</b>	SP4062MA	SP4062AA	SP4062CA
<b>UPC</b>	637203049019	637203049026	637203049866





## Q Series

Award-winning Depth and Clarity.



Q Series takes cutting-edge acoustic technology from ranges including The Reference and Blade to a wider selection of people. Representing exceptional value, Q Series unlocks detail and depth in whatever you choose to listen to.

### Key Features

- Uni-Q 'single point source' driver array disperses clean and accurate sound more evenly
- Damped Tweeter Loading Tube for detailed and natural HF performance
- REFERENCE inspired crossover with new, low distortion inductors
- Floorstanders (Q950, Q750, Q550):
  - i. Closed box midrange cabinet, drastically reducing distortion
  - ii. LF driver with dual ABRs for deeper and tighter bass reproduction
- Centre speakers:
  - i. Closed box midrange cabinet for drastically reduced distortion (Q650c only)
  - ii. ABRs for deeper bass reproduction
- Seamless baffles with magnetic grilles

### Key Technologies

- Uni-Q®

### Q950


Flagship 2.5-way floorstander



MSRP  
€899/piece

#### PRODUCT SPECIFICATION

<b>Design</b>	Two and a half-way bass reflex
<b>Drive units</b>	<b>Uni-Q driver array</b> 200mm (8 in.) aluminium Uni-Q HF: 38 mm (1.5 in.) vented aluminium dome LF: 200 mm (8 in.) Hybrid aluminium <b>Bass units</b> 2 x 200 mm (8 in.) aluminium
<b>Frequency response</b>	44 Hz - 28 kHz (±3 dB)
<b>Amplifier requirements</b>	15 - 200W
<b>Sensitivity</b>	91 dB
<b>Maximum output</b>	113 dB
<b>Impedance</b>	8 Ω (min. 3.2 Ω)
<b>Dimensions</b>	H1116 x W357 x D328 mm (43.9 x 14.1 x 12.9 in.)/piece
<b>Product weight</b>	20.6 kg (45.4 lbs.)/piece



#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H1200 x W458 x D366 mm (47.2 x 18 x 14.4 in.)/piece		
<b>Gross weight</b>	25.6 kg (56.4 lbs.)/piece		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Satin Black	b. Satin White	c. Walnut
<b>Item no.</b>	SP3962BA	SP3962AA	SP3962WA
<b>UPC</b>	637203215803	637203215827	637203216343

### Q750


Mid-sized 2.5-way floorstander



MSRP  
€699/piece

#### PRODUCT SPECIFICATION

<b>Design</b>	Two and a half-way bass reflex
<b>Drive units</b>	<b>Uni-Q driver array</b> 165 mm (6.5 in.) aluminium Uni-Q HF: 25 mm (1 in.) vented aluminium dome LF: 165 mm (6.5 in.) Hybrid aluminium <b>Bass units</b> 2 x 165 mm (6.5 in.) aluminium ABR
<b>Frequency response</b>	48 Hz - 28 kHz (±3 dB)
<b>Amplifier requirements</b>	15 - 250 W
<b>Sensitivity</b>	88 dB
<b>Maximum output</b>	111 dB
<b>Impedance</b>	8 Ω (min. 3.8 Ω)
<b>Dimensions</b>	H977 x W323 x D310 mm (38.5 x 12.7 x 12.2 in.)/piece
<b>Product weight</b>	16.5 kg (36.4 lbs.)/piece



#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H1052 x W440 x D336 mm (41.4 x 17.3 x 13.2 in.)/piece		
<b>Gross weight</b>	21.1 kg (46.5 lbs.)/piece		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Black Gloss	b. White Gloss	c. Walnut
<b>Item no.</b>	SP3961BA	SP3961AA	SP3961WA
<b>UPC</b>	637203215766	637203215780	637203216329



## Q550


Compact 2.5-way floorstander



MSRP  
€549/piece

### PRODUCT SPECIFICATION

<b>Design</b>	Two and a half-way bass reflex	
<b>Drive units</b>	<b>Uni-Q driver array</b> 130 mm (5.25 in.) aluminium Uni-Q LF: 25 mm (1 in.) vented aluminium dome MF: 130 mm (5.25 in.) Hybrid aluminium <b>Bass units</b> 2 x 130 mm (5.25 in.) aluminium	
<b>Frequency response</b>	58 Hz - 28 kHz (±3 dB)	
<b>Amplifier requirements</b>	15 - 130 W	
<b>Sensitivity</b>	87 dB	
<b>Maximum output</b>	110 dB	
<b>Impedance</b>	8 Ω (min. 3.5 Ω)	
<b>Dimensions</b>	H926 x W299 x D310 mm (36.5 x 11.8 x 12.2 in.)/piece	
<b>Product weight</b>	14.5 kg (32 lbs.)/piece	



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H1000 x W410 x D304 mm (39.4 x 16.1 x 12 in.)/piece		
<b>Gross weight</b>	18.7 kg (41.2 lbs.)/piece		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Satin Black	b. Satin White	c. Walnut
<b>Item no.</b>	SP3960BA	SP3960AA	SP3960WA
<b>UPC</b>	637203215643	637203215667	637203216305

## Q350


2-way bookshelf



MSRP  
€299.50/piece

### PRODUCT SPECIFICATION

<b>Design</b>	Two-way bass reflex	
<b>Drive units</b>	<b>Uni-Q driver array</b> 165 mm (6.5 in.) aluminium Uni-Q HF: 25 mm (1 in.) vented aluminium dome	
<b>Frequency response</b>	63 Hz - 28k Hz (±3 dB)	
<b>Amplifier requirements</b>	15 - 120 W	
<b>Sensitivity</b>	87 dB	
<b>Maximum output</b>	110 dB	
<b>Impedance</b>	8 Ω (min. 3.7 Ω)	
<b>Dimensions</b>	H362 x W210 x D306 mm (14.3 x 8.3 x 12 in.)/piece	
<b>Product weight</b>	7.6 kg (16.8 lbs.)/piece	



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H490 x W607 x D444 mm (19.3 x 23.9 x 17.5 in.)/pair		
<b>Gross weight</b>	18.3 kg (46.3 lbs.)/pair		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Satin Black	b. Satin White	c. Walnut
<b>Item no.</b>	SP3959BA	SP3959AA	SP3959WA
<b>UPC</b>	637203215728	637203215742	637203216282

## Q150


2-way bookshelf



MSRP  
€249.50/piece

### PRODUCT SPECIFICATION

<b>Design</b>	Two-way bass reflex	
<b>Drive units</b>	<b>Uni-Q driver array</b> 130 mm (5.25 in.) aluminium Uni-Q HF: 25 mm (1 in.) vented aluminium dome	
<b>Frequency response</b>	51 Hz - 28 kHz (±3 dB)	
<b>Amplifier requirements</b>	10 - 100 W	
<b>Sensitivity</b>	86 dB	
<b>Maximum output</b>	108 dB	
<b>Impedance</b>	8 Ω (min. 3.7 Ω)	
<b>Dimensions</b>	H307 x W180 x D278 mm (12.1 x 7.1 x 10.9 in.)/piece	
<b>Product weight</b>	5.6 kg (12.3 lbs.)/piece	



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H435 x W541 x D410 mm (17.1 x 21.3 x 16.1 in.)/pair		
<b>Gross weight</b>	13.9 kg (30.6 lbs.)/pair		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Satin Black	b. Satin White	c. Walnut
<b>Item no.</b>	SP3958BA	SP3958AA	SP3958WA
<b>UPC</b>	637203215681	637203215704	637203216268

## Q650c

2.5-way centre channel


€249.50/piece



MSRP  
€599/piece

### PRODUCT SPECIFICATION

<b>Design</b>	Two and a half-way bass reflex	
<b>Drive units</b>	<b>Uni-Q driver array</b> 165 mm (6.5 in.) aluminium Uni-Q HF: 25 mm (1 in.) vented aluminium dome LF: 165 mm (6.5 in.) Hybrid aluminium <b>Bass units</b> 165 mm (6.5 in.) aluminium	
<b>Frequency response</b>	64 Hz - 28 kHz (±3 dB)	
<b>Amplifier requirements</b>	15 - 150 W	
<b>Sensitivity</b>	87 dB	
<b>Maximum output</b>	110 dB	
<b>Impedance</b>	8 Ω (min. 4.2 Ω)	
<b>Dimensions</b>	H214 x W629 x D304 mm (8.4 x 24.8 x 12 in.)/piece	
<b>Product weight</b>	13.6 kg (30 lbs.)/piece	



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H334 x W754 x D437 mm (13.1 x 29.7 x 17.2 in.)/piece		
<b>Gross weight</b>	15.8 kg (34.8 lbs.)/piece		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Satin Black	b. Satin White	c. Walnut
<b>Item no.</b>	SP4060BA	SP4060AA	SP4060WA
<b>UPC</b>	637203218378	637203218361	637203218385

## Q250c


2-way centre channel



MSRP  
€499/piece

### PRODUCT SPECIFICATION

<b>Design</b>	Two-way bass reflex	
<b>Drive units</b>	<b>Uni-Q driver array</b> 130 mm (5.25 in.) aluminium Uni-Q HF: 25 mm (1 in.) vented aluminium dome	
<b>Frequency response</b>	51 Hz - 28 kHz (±3 dB)	
<b>Amplifier requirements</b>	10 - 100 W	
<b>Sensitivity</b>	86 dB	
<b>Maximum output</b>	108 dB	
<b>Impedance</b>	8 Ω (min. 3.7 Ω)	
<b>Dimensions</b>	H184 x W525 x D214 mm (7.2 x 20.7 x 8.4 in.)/piece	
<b>Product weight</b>	7.5 kg (16.5 lbs.)/piece	



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H318 x W657 x D352 mm (12.5 x 25.9 x 13.9 in.)/piece		
<b>Gross weight</b>	9.07 kg (20 lbs.)/piece		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Satin Black	b. Satin White	c. Walnut
<b>Item no.</b>	SP4016BA	SP4016AA	SP4016WA
<b>UPC</b>	637203217777	637203217760	637203217784

## Accessories

### Q950 Black Cloth Grille



MSRP  
€46/piece

### PRODUCT SPECIFICATION

<b>Dimensions</b>	H1035 x W236 x D10 mm (40.7 x 9.3 x 0.4 in.)/piece
<b>Product weight</b>	0.8 kg (1.76 lbs.)/piece

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H32 x W245 x D1110 mm (1.3 x 9.6 x 43.7 in.)/set	
<b>Gross weight</b>	118 kg (2.6 lbs.)/set	
<b>Warranty period</b>	2 years	
<b>Item no.</b>	SP3978BA	
<b>UPC</b>	637203216558	

### Q550 Black Cloth Grille



MSRP  
€34/piece

### PRODUCT SPECIFICATION

<b>Dimensions</b>	H845 x W174 x D13 mm (33.3 x 6.9 x 0.5 in.)/piece
<b>Product weight</b>	0.5 kg (1.1 lbs.)/piece

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H32 x W185 x D922 mm (1.3 x 7.3 x 36.3 in.)/set	
<b>Gross weight</b>	0.79 kg (1.7 lbs.)/set	
<b>Warranty period</b>	2 years	
<b>Item no.</b>	SP3976BA	
<b>UPC</b>	637203216534	

## Q50a


Dolby Atmos flexible surround



MSRP  
€299.50/piece

### PRODUCT SPECIFICATION

<b>Design</b>	Two-way Closed Box	
<b>Drive units</b>	<b>Uni-Q driver array</b> 130 mm (5.25 in.) aluminium Uni-Q HF: 25 mm (1 in.) vented aluminium dome	
<b>Frequency response</b>	105 Hz - 18.5 kHz (±3 dB)	
<b>Amplifier requirements</b>	10 - 100 W	
<b>Sensitivity</b>	86 dB	
<b>Maximum output</b>	106 dB	
<b>Impedance</b>	8 Ω (min. 4.6 Ω)	
<b>Dimensions</b>	H178 x W180 x D259 mm (7 x 7.1 x 10.2 in.)/piece	
<b>Product weight</b>	4.25 kg (9.4 lbs.)/piece	



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H286 x W473 x D382 mm (11.3 x 18.6 x 15 in.)/pair	
<b>Gross weight</b>	10.2 kg (22.5 lbs.)/pair	
<b>Warranty period</b>	5 years	
<b>Finishes</b>	a. Satin Black	b. Satin White
<b>Item no.</b>	SP3987BA	SP3987AA
<b>UPC</b>	637203216671	637203216657

### Q350 Black Cloth Grille



MSRP  
€19.50/piece

#### PRODUCT SPECIFICATION

**Dimensions** H330 x W200 x D10 mm  
(13 x 7.9 x 0.4 in.)/piece

**Product weight** 0.2 kg (0.44 lbs.)/piece

#### LOGISTIC SPECIFICATION

**Packaging dimensions** H32 x W214 x D408 mm (1.3 x 8.4 x 16.1 in.)/set

**Gross weight** 0.32 kg (0.7 lbs.)/set

**Warranty period** 2 years

**Item no.** SP3975BA

**UPC** 637203216527

### Q150 Black Cloth Grille



MSRP  
€16/piece

#### PRODUCT SPECIFICATION

**Dimensions** H274 x W173 x D9 mm  
(10.8 x 6.8 x 0.4 in.)/piece

**Product weight** 0.15 kg (0.33 lbs.)/piece

#### LOGISTIC SPECIFICATION

**Packaging dimensions** H32 x W184 x D353 mm (1.3 x 7.2 x 13.9 in.)/set

**Gross weight** 0.27 kg (0.6 lbs.)/set

**Warranty period** 2 years

**Item no.** SP3974BA

**UPC** 637203216510

### Q250c Black Cloth Grille



MSRP  
€36/piece

#### PRODUCT SPECIFICATION

**Dimensions** H516 x W170 x D9 mm  
(20.3 x 6.7 x 0.4 in.)/piece

**Product weight** 0.4 kg (0.88 lbs.)/piece

#### LOGISTIC SPECIFICATION

**Packaging dimensions** H35 x W186 x D597 mm (1.4 x 7.3 x 23.5 in.)/set

**Gross weight** 0.62 kg (1.4 lbs.)/set

**Warranty period** 2 years

**Item no.** SP4018BA

**UPC** 637203217708

### B2 Wall Bracket



MSRP  
€49/pair

#### PRODUCT SPECIFICATION

**Dimensions** Bracket: H39 x W148 x D28 mm  
(1.5 x 5.8 x 1.1 in.)/piece  
Rubber: H20 x W60 x D26 mm  
(0.8 x 2.4 x 1 in.)/piece

**Product weight** Bracket: 0.33 kg (0.7 lbs.)/piece  
Rubber: 32 g/piece

**Compatible models** Q150, Q350

#### LOGISTIC SPECIFICATION

**Packaging dimensions** H56 x W225 x D150 mm (2.2 x 8.9 x 5.9 in.)/pair

**Gross weight** 0.55 kg (1.2 lbs.)/pair

**Warranty period** 2 years

**Item no.** SP3980BA

**UPC** 637203044656







## LS50 Meta

The World's First Speakers with Metamaterial



LS50 Meta is a highly precise, emotionally engaging loudspeaker built on revolutionary acoustic technology. Designed around the Uni-Q 12<sup>th</sup> Generation with Metamaterial Absorption Technology driver array, this solid, compact loudspeaker is capable of delivering detailed sound anywhere in the room.

### Key Features

- Metamaterial Absorption Technology eliminates 99% of high-frequency distortion for pure, natural sound
- 12<sup>th</sup> generation Uni-Q with MAT™ driver array for exceptional acoustic accuracy
- Driver Performance Optimisation for enhanced sonic performance, less distortion and reduced coloration
- Patented off-set flexible port for reduced midrange coloration with exceptional levels of depth and detail

### Key Technologies

- Uni-Q®
- MAT™

## LS50 Meta

The World's First Speakers with Metamaterial



MSRP  
€649.50/piece

### PRODUCT SPECIFICATION

**Design** Two-way bass reflex

**Drive units** Uni-Q driver array  
HF: 25 mm (1 in.) vented aluminium dome with MAT  
MF/LF: 130 mm (5.25 in.) aluminium cone

**Frequency response** 9 Hz - 28 kHz (±3 dB)

**Amplifier requirements** 40-100 W


**Sensitivity** 85 dB

**Maximum output** 106 dB

**Impedance** 8 Ω (min. 3.5 Ω)

**Dimensions** H302 x 200 x 280.5 mm  
(11.9 x 7.9 x 11.0 in.)/piece

**Product weight** 7.8 kg (17.2 lbs.)/piece



### LOGISTIC SPECIFICATION

**Packaging dimensions** H407 x W565 x D368 mm (16 x 22.2 x 14.5 in.)/pair

**Gross weight** 17.8 kg (39.2 lbs.)/pair

**Warranty period** 5 years

**Finishes** a. Carbon Black    b. Titanium Grey    c. Mineral White

**Item no.** SP4027BA    SP4027HA    SP4027AA

**UPC** 637203217791    637203217821    637203217906

**Finishes** d. Royal Blue Special Edition

**Item no.** SP4027CA

**UPC** 637203217869





## T Series

### Slim Speakers, Serious Sound



As one of the world's thinnest high performance home theatre systems, the T Series combines several landmark innovations: a radical ultra-low profile bass and midrange driver, and a large, fully vented tweeter. By incorporating both in cabinets only 35mm (just over 1.25in.) deep, the T Series brings you all the pleasures of true audiophile quality sound in a speaker that perfectly complements the aesthetics of the latest flat screen TVs.

#### Key Features

- Exceptionally slim profile speakers that generate all the detail, spaciousness and dynamics of a high-end conventional design
- Ultra-slim bass driver that allows the enclosure to be as slim as a flat screen TV without compromising acoustic integrity
- Vented tweeter allows exceptional accuracy of reproduction, especially of the voice

#### T301 Satellite Speakers

Slim profile full-sized satellite speakers



MSRP  
€300/piece

##### PRODUCT SPECIFICATION

Design	Two and a half-way closed box
Drive units	HF: 25 mm (1 in.) aluminium MF: 2 x 115 mm (4.5 in.) dual layer
Frequency response	80 Hz - 30 kHz (±3 dB)
Amplifier requirements	10 - 150 W
Sensitivity	91 dB (wall mount) 88 dB (floor stand mount)
Maximum output	110 dB
Impedance	8 Ω
Dimensions	H600 x W140 x D35 mm (23.6 x 5.5 x 1.4 in.)/piece
Product weight	1.5 kg (3.3 lbs.)/piece



##### LOGISTIC SPECIFICATION

Packaging dimensions	H220 x W667 x D265 mm (8.7 x 26.3 x 10.4 in.)/pair	
Gross weight	6.8 kg (15 lbs.)/pair	
Warranty period	5 years	
Finishes	a. Black	b. White
Item no.	SP3745BB	SP3745AA
UPC	637203207785	637203210341

#### T101 Satellite Speakers

Slim profile compact satellite speakers



MSRP  
€229/piece

##### PRODUCT SPECIFICATION

Design	Two-way closed box
Drive units	HF: 25 mm (1 in.) aluminium MF: 115 mm (4.5 in.) dual layer
Frequency response	80 Hz - 30 kHz (±3 dB)
Amplifier requirements	10 - 100 W
Sensitivity	90 dB (wall mount) 87 dB (floor stand mount)
Maximum output	107 dB
Impedance	8 Ω
Dimensions	H330 x W140 x D35 mm (13.0 x 5.5 x 1.4 in.)/piece
Product weight	1 kg (2.2 lbs.)/piece



##### LOGISTIC SPECIFICATION

Packaging dimensions	H220 x W416 x D245 mm (8.7 x 16.4 x 9.6 in.)/pair	
Gross weight	4.5 kg (9.9 lbs.)/pair	
Warranty period	5 years	
Finishes	a. Black	b. White
Item no.	SP3744BB	SP3744AA
UPC	637203207792	637203210327

## T301c Centre Channel Speaker

Two and a half-way centre channel

MSRP  
€319/piece



PRODUCT SPECIFICATION	
<b>Design</b>	Two and a half-way closed box
<b>Drive units</b>	HF: 25 mm (1 in.) aluminium MF: 2 x 115 mm (4.5 in.) dual layer
<b>Frequency response</b>	80 Hz - 30 kHz (±3 dB)
<b>Amplifier requirements</b>	10-150 W
<b>Sensitivity</b>	91 dB (wall mount) 88 dB (floor stand mount)
<b>Maximum output</b>	110 dB
<b>Impedance</b>	8 Ω
<b>Dimensions</b>	H140 x W600 x D35 mm (5.5 x 23.6 x 1.4 in./piece)
<b>Product weight</b>	1.5 kg (3.3 lbs./piece)



LOGISTIC SPECIFICATION	
<b>Packaging dimensions</b>	H234 x W667 x D130 mm (9.2 x 26.3 x 5.1 in./piece)
<b>Gross weight</b>	3.5 kg (7.7 lbs./piece)
<b>Warranty period</b>	5 years
<b>Finishes</b>	a. Black      b. White
<b>Item no.</b>	SP3747BB      SP3747AA
<b>UPC</b>	637203207761      637203210358

## T101c Centre Channel Speaker

Two half-way centre channel

MSRP  
€240/piece



PRODUCT SPECIFICATION	
<b>Design</b>	Two-way closed box
<b>Drive units</b>	HF: 25 mm (1 in.) aluminium MF: 115 mm (4.5 in.) dual layer
<b>Frequency response</b>	80 Hz - 30 kHz (±3 dB)
<b>Amplifier requirements</b>	10-100 W
<b>Sensitivity</b>	90 dB (wall mount) 87 dB (floor stand mount)
<b>Maximum output</b>	107 dB
<b>Impedance</b>	8 Ω
<b>Dimensions</b>	H140 x W330 x D35 mm (5.5 x 13.0 x 1.4 in./piece)
<b>Product weight</b>	1 kg (2.2 lbs./piece)



LOGISTIC SPECIFICATION	
<b>Packaging dimensions</b>	H234 x W397 x D130 mm (9.2 x 15.6 x 5.1 in./piece)
<b>Gross weight</b>	2.2 kg (4.9 lbs./piece)
<b>Warranty period</b>	5 years
<b>Finishes</b>	a. Black      b. White
<b>Item no.</b>	SP3746BB      SP3746AA
<b>UPC</b>	637203207778      637203210334

## Systems

### T305 Home Theatre Speaker System

Slim profile full-sized  
5.1 Home Theatre System



MSRP  
/system

PRODUCT SPECIFICATION	
4 x T301	
1 x T301c	
1 x T2 subwoofer	

### T205 Home Theatre Speaker System

Slim profile mid-sized  
5.1 Home Theatre System



MSRP  
/system

PRODUCT SPECIFICATION	
2 x T301	
2 x T101	
1 x T301c	
1 x T2 subwoofer	

### T105 Home Theatre Speaker System

Slim profile compact  
5.1 Home Theatre System



MSRP  
/system

PRODUCT SPECIFICATION	
4 x T101	
1 x T101c	
1 x T2 subwoofer	

## Accessories

### T Series Floor Stand

This elegantly simple floor stand matches T Series satellites



MSRP  
€179/piece

PRODUCT SPECIFICATION	
<b>Dimensions</b>	H870 mm x W250 mm (34 in. x 9.8 in./stand)
<b>Product weight</b>	2.96 kg (6.5 lbs./stand)

LOGISTIC SPECIFICATION	
<b>Packaging dimensions</b>	H85 x W980 x D310 mm (3.3 x 38.6 x 12.2 in./pair)
<b>Gross weight</b>	7.16 kg (15.8 lbs./pair)
<b>Warranty period</b>	2 years
<b>Finishes</b>	a. Black      b. Silver
<b>Item no.</b>	SP3748BB      SP3748AA
<b>UPC</b>	637203207914      637203211003

# Wireless HiFi Speakers & Accessories



# LS Wireless Collection

## Immersion engines



KEF's engineers and designers have always been looking and listening ahead. The LS Wireless Collection is the sound of the future, bringing breakthrough technology including Uni-Q, Uni-Core, Metamaterial Absorption Technology (MAT) and Music Integrity Engine (MIE), into the home in a series of all-in-one, plug and play speaker systems. Each of the four models – LS60 Wireless, LS50 Wireless II, LSX II and LSX II LT – are specially developed to deliver room-filling, immersive sound experience for music, TV, movies and gaming. Stream High-Fidelity sound in its truest form, from any source, every time.



### LS60 Wireless

The immersion engine



MSRP  
€4,999/set

#### PRODUCT DESCRIPTION

**Key technologies** Uni-Q, MAT, Uni-core, SAS, MIE

#### PRODUCT SPECIFICATION

**Drive units** Uni-Q driver array  
HF: 19 mm (0.75 in.) vented aluminium dome with MAT  
MF: 100 mm (4 in.) aluminium cone  
Uni-Core Force Cancelling Driver  
LF: 4 x 135 mm (5.25 in.)

**Frequency response** 31 Hz - 24 kHz (±3 dB)

**Amplifier power (per speaker)** HF: 100 W, MF: 100 W, LF: 500 W

**Amplifier class (per speaker)** HF: Class AB, MF: Class D, LF: Class D


**MAX SPL** 111 dB (measured at 1 m)

**Inputs** HDMI eARC, Toslink Optical, Digital Coaxial, Analog RCA, USB Type A (service), RJ45 Ethernet (network), RJ45 Ethernet (interspeaker)

**Output** RCA Subwoofer output

**Dimensions** H1090 x W212 x D394 mm (42.9 x 8.3 x 15.5 in.)/piece

**Product weight** 62.4 kg (138 lbs.)/set



#### LOGISTIC SPECIFICATION

**Packaging dimensions** H1260 x W520 x D310 mm (49.6 x 20.5 x 12.2 in.)/piece

**Gross weight** 39 kg (86 lbs.)/piece

**Warranty period** 5 years

**Finishes** a. Carbon Black b. Titanium Grey c. Royal Blue

**Item no.** SP4017BB SP4017HB SP4017CB

**UPC** 637203050138 637203048203 637203048180

**Finishes** d. Mineral White e. Lotus Edition

**Item no.** SP4017AB SP4017B02

**UPC** 637203048197 637203050077

### LS50 Wireless II

The Ultimate Wireless HiFi Speakers



MSRP  
€2,299/set

#### PRODUCT DESCRIPTION

**Key technologies** Uni-Q, MAT, MIE

#### PRODUCT SPECIFICATION

**Drive units** Uni-Q driver array  
HF: 25 mm (1 in.) vented aluminium dome with MAT  
LF: 130 mm (5.25 in.) aluminium cone

**Frequency response** 45 Hz - 28 kHz (±3 dB)

**Amplifier power (per speaker)** HF: 100 W, LF: 280 W

**Amplifier class (per speaker)** HF: Class AB, MF: Class D, LF: Class D


**MAX SPL** 108 dB (measured at 1 m)

**Inputs** **Primary speaker** HDMI eARC, Toslink Optical, Digital Coaxial, Analog 3.5mm Auxiliary, USB Type A (service), RJ45 Ethernet (network), RJ45 Ethernet (interspeaker) **Secondary speaker** USB Type A (service), RJ45 Ethernet (interspeaker)

**Output** RCA Subwoofer output

**Dimensions** H305 x W200 x D311 mm (12.0 x 7.9 x 12.2 in.)/piece

**Product weight** 20.1 kg (44.31 lbs.)/set



#### LOGISTIC SPECIFICATION

**Packaging dimensions** H405 x W595 x D415 mm (15.9 x 23.4 x 16.3 in.)/pair

**Gross weight** 23.5 kg (51.8 lbs.)/pair

**Warranty period** 5 years

**Finishes** a. Carbon Black b. Titanium Grey c. Mineral White

**Item no.** SP4025BB SP4025HB SP4025AB

**UPC** 637203046926 637203046940 637203046933

**Finishes** d. Crimson Red Special Edition

**Item no.** SP4025KB

**UPC** 637203046957

## LSX II

The Definitive Compact Wireless HiFi




MSRP  
€1,399/set

### PRODUCT DESCRIPTION

Key technologies Uni-Q, MIE

### PRODUCT SPECIFICATION

<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 19 mm (0.75 in.) vented aluminium dome with MAT MF: 100 mm (4 in.) aluminium cone <b>Uni-Core Force Cancelling Driver</b> LF: 4 x 135 mm (5.25 in.)
<b>Frequency response</b>	54 Hz – 28 kHz (±3 dB)
<b>Amplifier power (per speaker)</b>	HF: 30W, LF: 70W
<b>Amplifier class (per speaker)</b>	HF: Class D, LF: Class D
<b>MAX SPL</b>	102 dB (measured at 1m)
<b>Inputs</b>	<b>Primary speaker</b> HDMI ARC, TOSLINK Optical, USB Type C, Analog 3.5mm Auxiliary, RJ45 Ethernet (network), RJ45 Ethernet (interspeaker) <b>Secondary speaker</b> RJ45 Ethernet (interspeaker)
<b>Output</b>	RCA Subwoofer output
<b>Dimensions</b>	H240 x W155 x D180 mm (9.5 x 6.1 x 7.1 in.)/piece
<b>Product weight</b>	7.2 kg (15.6 lbs.)/pair



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H355 x W430 x D250 mm (14 x 16.9 x 9.8 in.)/pair		
<b>Gross weight</b>	10 kg (22 lbs.)/pair		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Carbon Black	b. Mineral White	c. Cobalt Blue
<b>Item no.</b>	SP4041BB	SP4041AB	SP4041CB
<b>UPC</b>	637203047817	637203047824	637203047800
<b>Finishes</b>	d. Lava Red	e. Soundwave by Terence, Olive Green Conran	
<b>Item no.</b>	SP4041KB	SP4041DB	SP4041JB
<b>UPC</b>	637203047794	637203047831	637203047848

## LSX II LT

The new addition to the award-winning LSX family




MSRP  
€999/set

### PRODUCT DESCRIPTION

Key technologies Uni-Q, MIE

### PRODUCT SPECIFICATION

<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 19 mm (0.75 in.) aluminium dome LF/MF: 115 mm (4.5 in.) magnesium/aluminium alloy cone
<b>Frequency response</b>	54 Hz – 28 kHz (±3 dB)
<b>Amplifier power (per speaker)</b>	HF: 30 W, LF: 70 W
<b>Amplifier class (per speaker)</b>	HF: Class D, LF: Class D
<b>MAX SPL</b>	102 dB (measured at 1m)
<b>Inputs</b>	<b>Primary speaker</b> HDMI ARC, TOSLINK Optical, USB Type C, USB Type C (interspeaker), RJ45 Ethernet (network) <b>Secondary speaker</b> USB Type C (interspeaker)
<b>Output</b>	RCA Subwoofer output
<b>Dimensions</b>	H240 x W155 x D180 mm (9.5 x 6.1 x 7.1 in.)/piece
<b>Product weight</b>	6.8 kg (15 lbs.)/pair



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H320 x W475 x D255 mm (12.6 x 18.7 x 10 in.)/pair		
<b>Gross weight</b>	9 kg (19.8 lbs.)/pair		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Graphite Grey	b. Stone White	c. Sage Green
<b>Item no.</b>	SP4077M2BA	SP4077A2BA	SP4077J2BA
<b>UPC</b>	637203050626	637203050480	637203050558



## Accessories

### S2 Floor Stand


Stands that deliver



MSRP  
€225/piece

### PRODUCT SPECIFICATION

<b>Dimensions</b>	H657 x W226 x D308 mm (25.9 x 8.9 x 12.1 in.)/stand
<b>Product weight</b>	4.85 kg (10.7 lbs.)/stand
<b>Compatible models</b>	LS50 Wireless II, LS50 Meta



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H140 x W680 x D380 mm (5.5 x 26.8 x 15 in.)/pair		
<b>Gross weight</b>	11 kg (24.3 lbs.)/pair		
<b>Warranty period</b>	2 years		
<b>Finishes</b>	a. Carbon Black	b. Titanium Grey	c. Mineral White
<b>Item no.</b>	SP4030BA	SP4030HA	SP4030AA
<b>UPC</b>	637203046735	637203046759	637203046742
<b>Finishes</b>	d. Royal Blue Special Edition	e. Crimson Red Special Edition	
<b>Item no.</b>	SP4030CA	SP4030KA	
<b>UPC</b>	637203046780	637203046797	

### P1 Desk Pad

Desk Pad designed for LSX II and LSX II LT



MSRP  
€79.50/piece

### PRODUCT SPECIFICATION

<b>Dimensions</b>	H27.5 x W146.7 x D167.5 mm (2.9 x 5.8 x 6.6 in.)/piece
<b>Compatible models</b>	LSX II, LSX II LT



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H102 x W221 x D204 mm (4 x 8.7 x 8 in.)/pair	
<b>Gross weight</b>	1.5 kg (3.3 lbs.)/pair	
<b>Warranty period</b>	2 years	
<b>Finishes</b>	a. Black	b. Silver
<b>Item no.</b>	SP4013BA	SP4013GA
<b>UPC</b>	637203046025	637203046032

### K-Stream


Interspeaker cable



MSRP  
€159/piece

### PRODUCT SPECIFICATION

<b>Standard</b>	Category 6A cable (Cat 6A)
<b>Length</b>	8 metres
<b>Compatible models</b>	LS60 Wireless, LS50 Wireless II, LSX II



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H230 x W230 x D60 mm (9.1 x 9.1 x 2.4 in.)/piece	
<b>Gross weight</b>	0.5 kg (1.1 lbs.)/piece	
<b>Warranty period</b>	2 years	
<b>Finishes</b>	a. White with Copper	b. Titanium with Copper
<b>Item no.</b>	SP4063AX	SP4063HX
<b>UPC</b>	637203049095	637203049101

### S1 Floor Stand


Speaker stand for LSX II & LSX II LT



MSRP  
€174.50/piece

### PRODUCT SPECIFICATION

<b>Dimensions</b>	H683 x W208 x D251 mm (26.9 x 8.2 x 9.9 in.)/stand
<b>Product weight</b>	2.93 kg (6.5 lbs.)/stand
<b>Compatible models</b>	LSX II, LSX II LT



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H144 x W731 x D341 mm (5.7 x 28.8 x 13.4 in.)/pair		
<b>Gross weight</b>	7.4 kg (16.3 lbs.)/pair		
<b>Warranty period</b>	2 years		
<b>Finishes</b>	a. Cobalt Blue	b. Slate Grey	c. Crimson Red
<b>Item no.</b>	SP4030BA	SP4030HA	SP4030AA
<b>UPC</b>	637203046735	637203046759	637203046742
<b>Finishes</b>	d. Mineral White		
<b>Item no.</b>	SP4030CA		
<b>UPC</b>	637203046780		

### B1 Wall Bracket

Wall mount bracket for LSX II



MSRP  
€114.50/piece

### PRODUCT SPECIFICATION

<b>Dimensions</b>	H169 x W146.7 x D208.7 mm (6.7 x 5.8 x 8.2 in.)/piece
<b>Compatible models</b>	LSX II



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H123 x W304 x D224 mm (4.8 x 12 x 8.8 in.)/pair	
<b>Gross weight</b>	1.45 kg (3.2 lbs.)/pair	
<b>Warranty period</b>	2 years	
<b>Finishes</b>	a. Black	b. Silver
<b>Item no.</b>	SP4015BA	SP4015GA
<b>UPC</b>	637203046070	637203046063

### C-Link Interspeaker Cable

Interspeaker cable for LSX II LT



MSRP  
€59/piece

### PRODUCT SPECIFICATION

<b>Length</b>	8 metres
<b>Compatible models</b>	LSX II LT



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H187 x W230 x D40 mm (7.4 x 9.1 x 1.6 in.)/piece	
<b>Gross weight</b>	0.41 kg (0.9 lbs.)/piece	
<b>Warranty period</b>	2 years	
<b>Finishes</b>	Black	
<b>Item no.</b>	SP4030BAA	
<b>UPC</b>	637203050961	

## Headphones & Accessories





# Mu Headphones

Sound by KEF. Design by Ross Lovegrove.



Introducing Mu earphones and headphones, designed in collaboration with Ross Lovegrove. A design that complements KEF's obsession with pure, accurate sound, Mu earphones and headphones are the new chapter in the sound and design journey of KEF and Ross Lovegrove.

## Key Features

- Active Noise Cancellation tuned to eliminate external sound while preserving nuance and detail
- Full-range dynamic driver engineered to reveal the smallest details
- Exceptionally stable connections with both iOS and Android devices
- Intuitive touch control of music and calls
- Fast charging
- Ergonomic design for comfort and fit

## Mu7

Noise Cancelling Over-ear  
Wireless Headphones



MSRP  
€399/piece

### PRODUCT SPECIFICATION

Speaker drivers	40 mm
Max power output	15 mW
Bluetooth	5.1
Codec	SBC, AAC, aptX, aptX HD
Battery play time	40 hrs (BT + ANC on)
Fast Charging for 15 mins	8 hrs battery play time
Dimensions	H199 x W153 x D89 mm (7.8 x 6 x 3.5 in.)/piece
Product weight	309 g/piece



### LOGISTIC SPECIFICATION

Packaging dimensions	H80 x W260 x D230 mm (3.1 x 10.2 x 9.1 in.)/piece	
Gross weight	1 kg (2.2 lbs.)/piece	
Warranty period	2 years	
Finishes	a. Silver Grey	b. Charcoal Grey
Item no.	SP4029GA	SP4029HA
UPC	637203047329	637203047473

## Mu3

Noise Cancelling True  
Wireless Earphones



MSRP  
€230/pair

### PRODUCT SPECIFICATION

Speaker drivers	8.2 mm
Max power output	5 mW
Bluetooth	5.0
Codec	SBC, AAC
Battery play time	Earbud: 9 hrs (BT + ANC on) Charging case: 15 hrs
Fast Charging for 15 mins	1 hr battery play time
Dimensions	Earbud: H24.5 x W17.5 x D26.3 mm (1 x 0.7 x 1 in.)/piece Charging case: H33.5 x W62 x D52 mm (1.3 x 2.4 x 2 in.)/piece
Product weight	Earbud: 5.8 g/piece Charging case: 46.8 g/piece



### LOGISTIC SPECIFICATION

Packaging dimensions	H62 x W162 x D130 mm (2.4 x 6.4 x 5.1 in.)/piece	
Gross weight	0.31 kg (0.7 lbs.)/piece	
Warranty period	2 years	
Finishes	a. Silver Grey	b. Charcoal Grey
Item no.	SP4028GA	SP4028HA
UPC	637203047312	637203047466

## Accessories

### Mu7 Carrying Case

Protect your headphones in style



MSRP  
/piece

#### PRODUCT SPECIFICATION

Dimensions H250 x W220 x D65 mm  
(9.8 x 8.7 x 2.6 in.)/piece

#### LOGISTIC SPECIFICATION

Item no. SS4029-01G6

UPC 637203048869

### Mu7 Ear Cushions

Designed for comfort



MSRP  
/pair

#### PRODUCT SPECIFICATION

Dimensions H102 x W79 x D26 mm  
(4 x 3.1 x 1 in.)/piece

#### PRODUCT SPECIFICATION

Finishes a. Silver Grey b. Charcoal Grey

Item no. SS4029-01G2 SS4029-01G13

UPC 637203048845 637203048821



### Mu7 3.5mm Audio Cord

Wired or wireless, your choice



MSRP  
/piece

#### PRODUCT SPECIFICATION

Length 1.2m

#### PRODUCT SPECIFICATION

Item no. SS4029-01G14

UPC 637203048838

### Mu3 Charging Case

Power for the whole day



MSRP  
/piece


#### PRODUCT SPECIFICATION

Dimensions H33.5 x W62 x D52 mm  
(1.3 x 2.4 x 2 in.)/piece

Product weight 46.8g/piece

Battery play time 15 hrs

Battery charging USB-C



#### LOGISTIC SPECIFICATION

Finishes a. Silver Grey b. Charcoal Grey

Item no. SS4028-01G7 SS4028-01G16

UPC 637203047527 637203047596

### Mu3 Ear Tips

Designed for best fit



MSRP  
/set

#### PRODUCT SPECIFICATION

Package 3 pairs

Dimensions Large: 12.9mm (0.5 in.)  
Medium: 12mm (0.47 in.)  
Small: 10.7mm (0.42 in.)  
Short: 12.1mm (0.48 in.)



#### LOGISTIC SPECIFICATION

Finishes a. Silver Grey

Size Short Small Medium Large

Item no. SS4028-01G6B SS4028-01G3B SS4028-01G4B SS4028-01G5B

UPC 637203047565 637203047534 637203047541 637203047558

Finishes b. Charcoal Grey

Size Short Small Medium Large

Item no. SS4028-01G2B SS4028-01G1B SS4028-01G19B SS4028-01G20B

UPC 637203047640 637203047619 637203047626 637203047633



## **Subwoofers & Accessories**





## Subwoofers

Immersive power of deep detailed bass



Take home the immersive power of deep detailed bass with unrivalled acoustic accuracy that drops you right into the heart of the action. Over 60 years of innovation in crafting award-winning speakers has made us an authority in sound, and our subwoofer range brings home the visceral experience of modern immersive sound like no other for movies, gaming, music, and streaming.

### Reference 8b

Twin 9-inch driver force-cancelling subwoofer



MSRP  
**€6,000/piece**

#### PRODUCT FEATURES

- Two 500W Class D amplifiers
- KEF's ingenious force-cancelling technology
- Designed, engineered, handcrafted in Maidstone, UK

#### PRODUCT SPECIFICATION

<b>Design</b>	Force cancelled closed box
<b>Drive units</b>	LF: 2 x 225 mm (9 in.)
<b>Frequency response</b>	24 Hz (±3 dB)
<b>Amplifier type</b>	2 x 500 W Class D with switched mode power supply and DSP based control section
<b>Maximum output</b>	110 dB (peak sound pressure level at 1m/50Hz)
<b>Variable low pass filter</b>	Variable frequency: 40 Hz to 160 Hz Variable slope: 12 dB/oct, 18 dB/oct, 24 dB/oct LFE mode: 350 Hz, 18 dB/oct
<b>Input</b>	RCA phono sockets Analog XLR socket
<b>Power requirements</b>	100 V - 120 V / 220 V - 240 V, 50/60 Hz
<b>Power consumption</b>	1000 W
<b>Dimensions</b>	H398 x W365 x D429 mm (15.7 x 14.4 x 16.8 in.)/piece
<b>Product weight</b>	34kg (75 lbs.)/piece

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H598 x W556 x D496 mm (23.5 x 21.9 x 19.5 in.)/piece
<b>Gross weight</b>	40.7 kg (89.7 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no.</b>	SP3868BA
<b>UPC</b>	637203042430

### KC92

Twin 9-inch driver force-cancelling subwoofer



MSRP  
**€2,399/piece**

#### PRODUCT FEATURES

- Twin 9-inch force-cancelling driver array
- P-Flex pressure resistant surround design
- Music Integrity Engine® (MIE) - in-house developed DSP to further optimise performance
- iBX Intelligent Bass Extension allows to play louder and remain dynamic at any listening level
- Five room placement settings
- 1000W (2 x 500W) RMS Class D amplification
- Compact sealed cabinet
- Exceptionally versatile controls for easy integration with any loudspeaker and any home environment

**Key technologies** MIE

#### PRODUCT SPECIFICATION

<b>Design</b>	Force cancellation
<b>Drive units</b>	LF: 2 x 9" drivers
<b>Frequency response</b>	11 Hz - 200 Hz (±3 dB)
<b>Amplifier power</b>	1000W RMS (2 x 500W RMS)
<b>Amplifier class</b>	Built-in Class D
<b>Maximum output</b>	110 dB
<b>Variable low pass filter</b>	40 Hz - 140 Hz, LFE4
<b>Input</b>	RCA phono sockets Speaker level inputs Expansion port for KW1
<b>Power requirements</b>	100 - 240 V, 50/60 Hz
<b>Power consumption</b>	1000 W
<b>Dimensions</b>	H352.4 x W330 x D360.5 mm (13.9 x 13 x 14.2 in.)/piece
<b>Product weight</b>	20kg (44.1 lbs.)/piece



#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H495 x W460 x D460 mm (19.5 x 18.1 x 18.1 in.)/piece
<b>Gross weight</b>	22.6 kg (49.8 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Finishes</b>	a. White Gloss      b. Black Gloss
<b>Item no.</b>	SP4076A0BA      SP4076B0BA
<b>UPC</b>	637203050893      637203050824

## KC62

The biggest small subwoofer



MSRP  
€1,699/piece


### PRODUCT FEATURES

- Twin 6.5-inch Uni-Core force cancelling driver array
- P-Flex pressure resistant surround design
- Smart Distortion Control Technology
- Music Integrity Engine with iBX, SmartLimiter and Room Placement settings
- 1000W (2 x 500W) RMS Class D amplification
- Compact sealed aluminium cabinet
- Exceptionally versatile controls for easy integration with any loudspeaker and any home environment

**Key technologies** Uni-Core®

### PRODUCT SPECIFICATION

<b>Design</b>	Uni-Core force cancellation
<b>Drive units</b>	LF: 2 x 6.5 in. drivers
<b>Frequency response</b>	11Hz - 200Hz (±3dB)
<b>Amplifier power</b>	1000W RMS (2 x 500W RMS)
<b>Amplifier class</b>	Built-in Class D
<b>Maximum output</b>	105 dB
<b>Variable low pass filter</b>	40 Hz - 140 Hz, LFE
<b>Low level signal inputs</b>	RCA phono sockets, Speaker level inputs
<b>Power requirements</b>	100 - 240 V, 50/60Hz
<b>Power consumption</b>	1000W
<b>Dimensions</b>	H246 x W256 x D248 mm (9.69 x 10.07 x 9.76 in./piece)
<b>Product weight</b>	14kg (30.9 lbs./piece)



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H385 x W400 x D380 mm (15.2 x 15.7 x 15 in./piece)		
<b>Gross weight</b>	15 kg (33 lbs./piece)		
<b>Warranty period</b>	5 years		
<b>Finishes</b>	a. Mineral White	b. Carbon Black	c. Titanium Grey
<b>Item no.</b>	SP3949AA	SP3949BA	SP3949HA
<b>UPC</b>	637203217838	637203218033	637203049118

## Kube 15 MIE

15-inch front-firing active subwoofer



MSRP  
€1,299/piece

### PRODUCT FEATURES

- The largest model in the Kube range with the highest output
- Music Integrity Engine® (MIE) - KEF's in-house DSP - optimises the performance of each model
- Three room placement settings
- 300W RMS Class D amplification
- KEF SmartConnect intelligent inputs to automatically detect mono or stereo and adjust the subwoofer volume level accordingly
- Versatile controls for easy integration with any loudspeaker and any home environment
- Sealed for greater accuracy while allowing the Kube to be installed in a cabinet

**Key technologies** MIE

### PRODUCT SPECIFICATION

<b>Design</b>	Powered Subwoofer (Sealed)
<b>Drive units</b>	LF: 1 x 380mm (15in.)
<b>Frequency response</b>	20Hz - 140Hz (±3dB)
<b>Amplifier power</b>	300W RMS
<b>Amplifier class</b>	Class-D
<b>Maximum output</b>	116 dB
<b>Variable low pass filter</b>	40 Hz - 140 Hz, LFE
<b>Inputs</b>	RCA phono sockets, Speaker level inputs, Expansion port for KW1
<b>Power requirements</b>	100-240 V, 50/60 Hz
<b>Power consumption</b>	300 VA
<b>Dimensions</b>	H519 x W500 x D515 mm (20.4 x 19.7 x 20.3 in./piece)
<b>Product weight</b>	27.5 kg (60.6 lbs./piece)

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H630 x W625 x D605 mm (24.8 x 24.6 x 23.8 in./piece)		
<b>Gross weight</b>	34.3 kg (75.6 lbs./piece)		
<b>Warranty period</b>	5 years		
<b>Item no.</b>	SP4102B0BA		
<b>UPC</b>	637203050206		

## Kube 10 MIE

10-inch front-firing active subwoofer



MSRP  
€799/piece

### PRODUCT FEATURES

- The mid-sized model in the Kube range
- Music Integrity Engine® (MIE) - KEF's in-house DSP - optimises the performance of each model
- Three room placement settings
- 300W RMS Class D amplification
- KEF SmartConnect intelligent inputs to automatically detect mono or stereo and adjust the subwoofer volume level accordingly
- Versatile controls for easy integration with any loudspeaker and any home environment
- Sealed for greater accuracy while allowing the Kube to be installed in a cabinet

**Key technologies** MIE

### PRODUCT SPECIFICATION

<b>Design</b>	Powered Subwoofer (Sealed)
<b>Drive units</b>	LF: 1 x 250mm (10in.)
<b>Frequency response</b>	24Hz - 140Hz (±3dB)
<b>Amplifier power</b>	300W RMS
<b>Amplifier class</b>	Class-D
<b>Maximum output</b>	111 dB
<b>Variable low pass filter</b>	40Hz - 140Hz, LFE
<b>Input</b>	RCA phono sockets, Speaker level inputs, Expansion port for KW1
<b>Power requirements</b>	100-240 V, 50/60 Hz
<b>Power consumption</b>	300 VA
<b>Dimensions</b>	H370 x W353 x D370 mm (14.6 x 13.9 x 14.6 in./piece)
<b>Product weight</b>	15.4 kg (34 lbs./piece)

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H495 x W495 x D440 mm (19.5 x 19.5 x 17.3 in./piece)		
<b>Gross weight</b>	18.3 kg (40.3 lbs./piece)		
<b>Warranty period</b>	5 years		
<b>Item no.</b>	SP4074B0BA		
<b>UPC</b>	637203050343		

## Kube 8 MIE

8-inch front-firing active subwoofer



MSRP  
€649/piece

### PRODUCT FEATURES

- The most compact model in the Kube range
- Music Integrity Engine® (MIE) - KEF's in-house DSP - optimises the performance of each model
- Three room placement settings
- 300W RMS Class D amplification
- KEF SmartConnect intelligent inputs to automatically detect mono or stereo and adjust the subwoofer volume level accordingly
- Versatile controls for easy integration with any loudspeaker and any home environment
- Sealed for greater accuracy while allowing the Kube to be installed in a cabinet

**Key technologies** MIE

### PRODUCT SPECIFICATION

<b>Design</b>	Powered Subwoofer (Sealed)
<b>Drive units</b>	1 x 200 mm (8 in.)
<b>Frequency response</b>	34 Hz - 140 Hz (-6dB)
<b>Amplifier power</b>	300W RMS
<b>Amplifier class</b>	Class-D
<b>Maximum output</b>	105 dB
<b>Variable low pass filter</b>	40 Hz - 140 Hz, LFE
<b>Input</b>	RCA phono sockets, Speaker level inputs, Expansion port for KW1
<b>Power requirements</b>	100-240 V, 50/60 Hz
<b>Power consumption</b>	300 VA
<b>Dimensions</b>	H293 x W293 x D310 mm (11.5 x 11.5 x 12.2 in./piece)
<b>Product weight</b>	9.4 kg (20.7 lbs./piece)

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H415 x W410 x D380 mm (16.3 x 16.1 x 15 in./piece)		
<b>Gross weight</b>	11.7 kg (25.8 lbs./piece)		
<b>Warranty period</b>	5 years		
<b>Item no.</b>	SP4102B0BA		
<b>UPC</b>	637203050275		

## Accessories

### KW1

Wireless Subwoofer Adapter Kit



MSRP

### PRODUCT SPECIFICATION

<b>Radio frequency</b>	5.2GHz and 5.8GHz
<b>Sampling rate</b>	24bit, 48KHz
<b>Latency</b>	<17ms
<b>Link distance</b>	Max 100 ft (Line of sight)
<b>Frequency response</b>	10 Hz - 20 kHz
<b>Signal-to-noise ratio</b>	>80 dB
<b>Transmitter power</b>	5V DC 1A
<b>Audio output level</b>	2 V
<b>Transmitter input level</b>	2 V
<b>Total harmonic distortion</b>	typ. -90 dB
<b>Radio frequency output power</b>	5150-5250MHz<=2 dBm 5725-5850MHz<=7 dBm
<b>Dimensions</b>	Transmitter: H21.4 x W72 x D79.5mm (0.8 x 2.8 x 3.1 in./piece) Receiver: H27 x W37 x D72mm (1.1 x 1.5 x 2.8 in./piece)

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H80 x W165 x D125 mm (3.1 x 6.5 x 4.9 in./set)		
<b>Gross weight</b>	0.33 kg (0.73 lbs./set)		
<b>Warranty period</b>	2 years		
<b>HS code</b>	85255000(00)		
<b>Item no.</b>	SP4020BA		
<b>UPC</b>	637203046650		

## T2 Subwoofer

Slim profile subwoofer



MSRP  
€749/piece

### PRODUCT FEATURES

- Uniquely slim profile
- 250 Watts Class D amp and 10in. driver

**Key technologies** MIE

### PRODUCT SPECIFICATION

<b>Design</b>	Closed box powered subwoofer
<b>Drive units</b>	1 x 250mm (10in.)
<b>Frequency response</b>	30 Hz - 250 Hz
<b>Amplifier type</b>	250 Watts built-in Class-D
<b>Maximum output</b>	110 dB
<b>Variable low pass filter</b>	Fixed 250 Hz, 2nd-order
<b>Input</b>	RCA phono sockets
<b>Power requirements</b>	100-240 V ac, 50/60 Hz
<b>Dimensions</b>	H380 x W370 x D177 mm (15.6 x 14.6 x 7.0 in./piece)
<b>Product weight</b>	13 kg (28.6 lbs./piece)



### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H502 x W490 x D326 mm (19.8 x 19.3 x 12.8 in./piece)	
<b>Gross weight</b>	12.3 kg (27.1 lbs./piece)	
<b>Warranty period</b>	5 years	
<b>Finishes</b>	a. White	b. Black
<b>Item no.</b>	SP3740ABE	SP3740BBE
<b>UPC</b>	637203210082	637203209413

### KSK92

Subwoofer Staking Kit



MSRP

### PRODUCT SPECIFICATION

<b>Dimensions</b>	Frame: H360 x W15 x D10mm (14.2 x 0.6 x 0.4 in./ frame) Soft material layer: H310 x W262mm (12.2 x 10.3 in./piece)
<b>Product weight</b>	0.41kg (0.9 lbs./pair)

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H25 x W404 x D267 mm (1 x 15.9 x 10.5 in./pair)	
<b>Gross weight</b>	0.67 kg (1.5 lbs./pair)	
<b>Warranty period</b>	2 years	
<b>HS code</b>	94032080(00)	
<b>Item no.</b>	SP4108B0AA	
<b>UPC</b>	637203051074	



# Architectural Speakers & Accessories



# Extreme Home Theatre

Bring the Theatre Home



Setting a new standard for architectural speakers, KEF's Extreme Home Theatre pushes the boundaries of technology to bring you best-in-class acoustic performance, impeccable design and easy installation too. Hundreds of performance and quality assurance tests have been undertaken to be THX® Certified Dominus and THX® Certified Ultra, proof of the system's ability to deliver breathtakingly realistic, completely immersive, cinematic sound, just as the director intended.

## Key Features

- KEF + THX Testing Lab collaboration: officially certified theater specifications
- KEF signature Uni-Q technology, offering an open and wide soundstage
- Easy to install with expert finishing and ingenious build quality, ensuring epic performance
- Can be configured vertically or horizontally to suit your needs
- Magnetic grilles included; fabric grilles sold separately for select models

## Ci-Reference Series

### Ci5160REFM-THX

THX CERTIFIED DOMINUS

KEF's first THX® Certified Dominus speaker



MSRP  
€11,000/piece

#### PRODUCT SPECIFICATION

**Drive Units** Uni-Q driver array  
HF: 25 mm (1 in.) vented aluminium dome with MAT  
MF: 125 mm (5.25 in.) Uni-Q  
**Bass units**  
LF: 4 x 160 mm (6.5 in.)

**Amplifier requirements** 50-500 W

**Sensitivity** 92dB

**Impedance** 4Ω

**Rough-in frame** RIF5160L

**Certification** THX Certified Dominus

**Dimensions** H1070 x W230 x D105.7 mm  
(42.13 x 9.06 x 4.16 in.) /piece

**Cut-out dimensions** H1052 x W209 mm (41.42 x 8.23 in.)

**Mounting depth from surface** 99 mm (3.9 in.)

**Product weight** 21.7 kg (47.8 lbs.)



Designed, Engineered, and handcrafted in Maidstone, UK

#### LOGISTIC SPECIFICATION

**Packaging dimensions** H357 x W1181 x D236 mm (14.06 x 46.50 x 9.29 in.) /piece

**Gross weight** 24.2 kg (53.4 lbs.) /piece

**Warranty period** 5 years

**Item no** SP4070BOAA

**UPC** 637203049927

### Ci3160REFM-THX

THX CERTIFIED ULTRA

THX® Certified Ultra Speaker with MAT™



MSRP  
€8,000/piece

#### PRODUCT SPECIFICATION

**Drive Units** Uni-Q driver array  
HF: 25 mm (1 in.) vented aluminium dome with MAT  
MF: 125 mm (5.25 in.) Uni-Q  
**Bass units**  
LF: 2 x 160 mm (6.5 in.)

**Amplifier requirements** 50-350W

**Sensitivity** 89 dB

**Impedance** 4Ω

**Rough-in frame** RIF3160L

**Certification** THX Certified Ultra

**Dimensions** H680 x W230 x D105.7 mm  
(26.77 x 9.06 x 4.16 in.) /piece

**Cut-out dimensions** H660 x W209 mm (25.98 x 8.23 in.)

**Mounting depth from surface** 99 mm (3.9 in.)

**Product weight** 13.6 kg (29.92 lbs.)



Designed, Engineered, and handcrafted in Maidstone, UK

#### LOGISTIC SPECIFICATION

**Packaging dimensions** H233 x W805 x D326 mm (9.17 x 31.69 x 12.83 in.) /piece

**Gross weight** 15.1 kg (33.3 lbs.) /piece

**Warranty period** 5 years

**Item no** SP4069BOAA

**UPC** 637203049910

## Ci-R Series

### Ci5160RLM-THX

THX® CERTIFIED ULTRA

Ultra-high performance architectural speaker with MAT™



<b>MSRP</b>	<b>€2,800/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 160 mm (6.5 in.) Uni-Q <b>Bass units</b> LF: 4 x 160 mm (6.5 in.)
<b>Amplifier requirements</b>	50-350 W
<b>Sensitivity</b>	89 dB
<b>Impedance</b>	4 Ω
<b>Rough-in frame</b>	RIF5160L
<b>Certification</b>	THX Certified Ultra
<b>Dimensions</b>	H1070 x W230 x D105.7 mm (42.13 x 9.06 x 4.16 in.)/piece
<b>Cut-out dimensions</b>	H1052 x W209 mm (41.42 x 8.23 in.)
<b>Mounting depth from surface</b>	99 mm (3.9 in.)
<b>Product weight</b>	18.7 kg (41.1 lbs.)/piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H353 x W1178 x D236 mm (13.90 x 46.38 x 9.29 in.)/piece
<b>Gross weight</b>	21.2 kg (46.7 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no.</b>	SP4079G0AA
<b>UPC</b>	637203218811

### Ci3160RLM-THX

THX® CERTIFIED ULTRA

THX® Certified Ultra Speaker with MAT™



<b>MSRP</b>	<b>€1,800/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) vented aluminium dome with MAT MF: 125 mm (5.25 in.) Uni-Q <b>Bass units</b> LF: 2 x 160 mm (6.5 in.)
<b>Amplifier requirements</b>	50-350 W
<b>Sensitivity</b>	89 dB
<b>Impedance</b>	4 Ω
<b>Rough-in frame</b>	RIF3160L
<b>Certification</b>	THX Certified Ultra
<b>Dimensions</b>	H680 x W230 x D105.7 mm (26.77 x 9.06 x 4.16 in.)/piece
<b>Cut-out dimensions</b>	H660 x W209 mm (25.98 x 8.23 in.)
<b>Mounting depth from surface</b>	99 mm (3.9 in.) /piece
<b>Product weight</b>	12 kg (26.4 lbs.) /piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H322 x W768 x D227 mm (12.68 x 30.24 x 8.94 in.)/piece
<b>Gross weight</b>	13.4 kg (29.5 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no.</b>	SP4078G0AA
<b>UPC</b>	637203218804

### Ci200RS-THX

THX® CERTIFIED ULTRA

Features KEF's patented Uni-Q driver array



<b>MSRP</b>	<b>€699/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 38 mm (1.5 in.) <b>Bass units</b> LF: 200 mm (8 in.) Uni-Q
<b>Amplifier requirements</b>	10-190 W
<b>Sensitivity</b>	90 dB
<b>Impedance</b>	4 Ω
<b>Rough-in frame</b>	RIF200S
<b>Rear enclosure</b>	RNC200S
<b>Certification</b>	THX Certified Ultra, IP64
<b>Dimensions</b>	H273 x W273 x D132.6 mm (10.75 x 10.75 x 5.22 in.)/piece
<b>Cut-out dimensions</b>	H240 x W240 mm (9.45 x 9.45 in.)
<b>Mounting depth from surface</b>	127 mm (5 in.)
<b>Product weight</b>	3.6 kg (7.94 lbs.) /piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H362 x W357 x D222 mm (14.25 x 14.06 x 8.74 in.)/piece
<b>Gross weight</b>	4.5 kg (9.9 lbs.) /piece
<b>Warranty period</b>	5 years
<b>Item no.</b>	SP3927AA
<b>UPC</b>	637203215520

### Ci160RR-THX

THX® CERTIFIED ULTRA

THX® Certified Ultra Architectural Speaker



<b>MSRP</b>	<b>€629/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 25 mm (1 in.) <b>Bass units</b> LF: 165 mm (6.5 in.) Uni-Q
<b>Amplifier requirements</b>	10-150 W
<b>Sensitivity</b>	89 dB
<b>Impedance</b>	4 Ω
<b>Rough-in frame</b>	RIF160R
<b>Rear enclosure</b>	RNC160R
<b>Certification</b>	THX Certified Ultra, IP64
<b>Dimensions</b>	Ø234.6 mm x D115 mm (9.24 in. x 4.53 in.)/piece
<b>Cut-out dimensions</b>	Ø196 mm (7.71 in.)
<b>Mounting depth from surface</b>	110 mm (4.33 in.)
<b>Product weight</b>	2.94 kg (6.48 lbs.) /piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H314 x W308 x D187 mm (12.36 x 12.13 x 7.36 in.)/piece
<b>Gross weight</b>	3.5 kg (7.7 lbs.) /piece
<b>Warranty period</b>	5 years
<b>Item no.</b>	SP4021AA
<b>UPC</b>	637203217654

### Ci250RRM-THX

THX® CERTIFIED ULTRA

KEF's First Architectural Speaker with MAT™



<b>MSRP</b>	<b>€1,700/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 19 mm (0.75 in.) vented aluminium dome with MAT MF: 100 mm (4 in.) Uni-Q <b>Bass units</b> LF: 250 mm (10 in.)
<b>Amplifier requirements</b>	50-250 W
<b>Sensitivity</b>	89 dB
<b>Impedance</b>	8 Ω
<b>Certification</b>	THX Certified Ultra, IP64
<b>Dimensions</b>	Ø346 x D175 mm (13.62 x 6.89 in.)/piece
<b>Cut-out dimensions</b>	Ø300 mm (11.81 in.)
<b>Mounting depth from surface</b>	168 mm (6.62 in.)
<b>Product weight</b>	6 kg (13.2 lbs.)/piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H422 x W420 x D277 mm (16.61 x 16.54 x 10.91 in.) /piece
<b>Gross weight</b>	8.1 kg (17.9 lbs.) /piece
<b>Warranty period</b>	5 years
<b>Item no.</b>	SP4023AA
<b>UPC</b>	637203218392

### Ci200RR-THX

THX® CERTIFIED ULTRA

Features KEF's patented Uni-Q driver array



<b>MSRP</b>	<b>€699/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Drive units</b>	<b>Uni-Q driver array</b> HF: 38 mm (1.5 in.) <b>Bass units</b> LF: 200 mm (8 in.) Uni-Q
<b>Amplifier requirements</b>	10-190 W
<b>Sensitivity</b>	90 dB
<b>Impedance</b>	4 Ω
<b>Rough-in frame</b>	RIF200R
<b>Rear enclosure</b>	RNC200R
<b>Certification</b>	THX Certified Ultra, IP64
<b>Dimensions</b>	Ø290 x D132.6 mm (11.42 x 5.22 in.)/piece
<b>Cut-out dimensions</b>	Ø238 mm (9.37 in.)
<b>Mounting depth from surface</b>	126.5 mm (4.98 in.)
<b>Product weight</b>	3.6 kg (7.94 lbs.) /piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H362 x W357 x D222 mm (14.25 x 14.06 x 8.74 in.) /piece
<b>Gross weight</b>	4.4 kg (9.7 lbs.) /piece
<b>Warranty period</b>	5 years
<b>Item no.</b>	SP3836AA
<b>UPC</b>	637203211430

## Ci-Q Series

### Ci4100QL-THX

THX® CERTIFIED SELECT

Features KEF's patented Uni-Q driver array



<b>MSRP</b>	<b>€500/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Drive units</b>	HF: 19 mm (0.75 in.) Uni-Q MF: 100 mm (4 in.) LF: 3 x 100 mm (4 in.)
<b>Amplifier requirements</b>	10 - 150 W
<b>Sensitivity</b>	89 dB
<b>Impedance</b>	4 Ω
<b>Rough-in frame</b>	RIF4100L
<b>Certification</b>	THX Certified Select, IP64
<b>Dimensions</b>	H490 x W128 x D81 mm (19.29 x 5.04 x 3.19 in.)/piece
<b>Cut-out dimensions</b>	H476 x W114 mm (18.74 x 4.49 in.)
<b>Mounting depth from surface</b>	76 mm (3.0 in.)
<b>Product weight</b>	3 kg (6.61 lbs.)/piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H191 x W558 x D117 mm (7.52 x 21.97 x 4.61 in.)/piece
<b>Gross weight</b>	3.8 kg (8.4 lbs.) /piece
<b>Warranty period</b>	5 years
<b>Item no.</b>	SP3831AA
<b>UPC</b>	63720321164

## Accessories

### Cloth Grille

for Ci5160REFM-THX & Ci5160RLM-THX



<b>MSRP</b>	<b>€158/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Dimensions</b>	H104 x W204 x D7 mm (41.1 x 8 x 0.3 in.)/piece
<b>Product weight</b>	0.37 kg (0.8 lbs.)/piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H30 x W1060 x D223 mm (1.2 x 41.7 x 8.8 in.)/piece
<b>Gross weight</b>	0.9 kg (2 lbs.)/piece
<b>Warranty period</b>	2 years
<b>Item no.</b>	SP3854BB
<b>UPC</b>	637203212109

### Cloth Grille

for Ci3160REFM-THX & Ci3160RLM-THX



<b>MSRP</b>	<b>€116/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Dimensions</b>	H654 x W204 x D7 mm (25.7 x 8 x 0.3 in.)/piece
<b>Product weight</b>	0.3 kg (0.7 lbs.)/piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H30 x W673 x D223 mm (1.2 x 26.5 x 8.8 in.)/piece
<b>Gross weight</b>	0.6 kg (1.3 lbs.)/piece
<b>Warranty period</b>	2 years
<b>Item no.</b>	SP3852BB
<b>UPC</b>	637203212093



# In-Ceiling & In-Wall Speakers

Designed to disappear into your environment



KEF's comprehensive collection of in-ceiling and in-wall architectural speakers offer exceptional performance from models designed to disappear into their environment. Whether you require the class defining abilities or the space saving features, KEF has the perfect speaker for your installation.

## Key Features

- Ultra-thin bezel design, magnetic paintable grille
- Weather resistant, IP64 certified
- Fast and easy to install. KEF engineering approved build quality

## Ci-Q Series

### Ci200QL

Features KEF's patented Uni-Q driver array



<b>MSRP</b> €471/piece	
<b>PRODUCT SPECIFICATION</b>	
<b>Drive Units</b>	HF: 25mm (1 in.) LF: 200mm (8 in.) Uni-Q
<b>Amplifier requirements</b>	10-150 W
<b>Sensitivity</b>	90 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF200L
<b>Rear enclosure</b>	RNC200L
<b>Certification</b>	IP64
<b>Dimensions</b>	H369 x W273 x D106 mm (14.53 x 10.75 x 4.27 in.)/piece
<b>Cut-out dimensions</b>	H334 x W238 mm (13.15 x 9.37 in.)
<b>Mounting depth from surface</b>	99.8 mm (3.93 in.)
<b>Product weight</b>	2.6 kg (5.77 lbs.)/piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H145 x W509 x D355 mm (5.7 x 20 x 14 in.)/piece
<b>Gross weight</b>	3.3 kg (7.3 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3777AA
<b>UPC</b>	637203208621

### Ci160QL

Features KEF's patented Uni-Q driver array



<b>MSRP</b> €345/piece	
<b>PRODUCT SPECIFICATION</b>	
<b>Drive Units</b>	HF: 19 mm (0.75 in.) LF: 160 mm (6.5 in.) Uni-Q
<b>Amplifier requirements</b>	10 - 125 W
<b>Sensitivity</b>	89 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF160L
<b>Rear enclosure</b>	RNC160L
<b>Certification</b>	IP64
<b>Dimensions</b>	H303 x W223 x D97.5 mm (11.93 x 8.78 x 3.84 in.)/piece
<b>Cut-out dimensions</b>	H274 x 194 mm (10.79 x 7.64 in.)
<b>Mounting depth from surface</b>	91 mm (3.58 in.)
<b>Product weight</b>	2.05 kg (4.51 lbs.)/piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H139 x W382 x D284 mm (5.5 x 15 x 11.2 in.)/piece
<b>Gross weight</b>	2.7 kg (6 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3775AA
<b>UPC</b>	637203208539

### Ci200QS

Features KEF's patented Uni-Q driver array



<b>MSRP</b> €450/piece	
<b>PRODUCT SPECIFICATION</b>	
<b>Drive Units</b>	HF: 25 mm (1 in.) Uni-Q LF: 200 mm (8 in.)
<b>Amplifier requirements</b>	10-150 W
<b>Sensitivity</b>	90 dB (2.83V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF200S
<b>Rear enclosure</b>	RNC200S
<b>Certification</b>	IP64
<b>Dimensions</b>	H273 x W273 x D106 mm (10.75 x 10.75 x 4.17 in.)/piece
<b>Cut-out dimensions</b>	H238 x W238 mm (9.37 x 9.37 in.)
<b>Mounting depth from surface</b>	99.8 mm (3.93 in.)
<b>Product weight</b>	2.4 kg (5.3 lbs.)/piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H145 x W415 x D355 mm (5.7 x 16.3 x 14 in.)/piece
<b>Gross weight</b>	3.1 kg (6.8 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3773AA
<b>UPC</b>	637203208614

### Ci160QS

Features KEF's patented Uni-Q driver array



<b>MSRP</b> €314/piece	
<b>PRODUCT SPECIFICATION</b>	
<b>Drive Units</b>	HF: 19 mm (0.75 in.) Uni-Q LF: 160 mm (6.5 in.)
<b>Amplifier requirements</b>	10-125 W
<b>Sensitivity</b>	89 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF160S
<b>Rear enclosure</b>	RNC160S
<b>Certification</b>	IP64
<b>Dimensions</b>	H223 x W223 x D97 mm (8.78 x 8.78 x 3.82 in.)/piece
<b>Cut-out dimensions</b>	194 x 194 mm (7.64 x 7.64 in.)
<b>Mounting depth from surface</b>	91 mm (3.58 in.)
<b>Product weight</b>	1.88 kg (4.14 lbs.)/piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H139 x W302 x D284 mm (5.5 x 11.9 x 11.2 in.)/piece
<b>Gross weight</b>	2.4 kg (5.3 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3771AA
<b>UPC</b>	637203208515

### Ci130QS

Features KEF's patented Uni-Q driver array



<b>MSRP</b> €261/piece	
<b>PRODUCT SPECIFICATION</b>	
<b>Drive Units</b>	HF: 19 mm (0.75 in.) LF: 130 mm (5.25 in.) Uni-Q
<b>Amplifier requirements</b>	10-100 W
<b>Sensitivity</b>	87 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF130S
<b>Rear enclosure</b>	RNC130S
<b>Certification</b>	IP64
<b>Dimensions</b>	H184 x 184 x 84 mm (7.24 x 7.24 x 3.26 in.)/piece
<b>Cut-out dimensions</b>	H158 x W158 mm (6.22 x 6.22 in.)
<b>Mounting depth from surface</b>	77.9 mm (3.07 in.)
<b>Product weight</b>	1.4 kg (3.1 lbs.) /piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H139 x W275 x D255 mm (5.5 x 10.8 x 10 in.)/piece
<b>Gross weight</b>	1.8 kg (4 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3768AA
<b>UPC</b>	637203208706

### Ci200QR

Thin bezel and narrow rim allow for flawless integration



<b>MSRP</b> €450/piece	
<b>PRODUCT SPECIFICATION</b>	
<b>Drive Units</b>	HF: 25 mm (1 in.) LF: 200 mm (8.0 in.) Uni-Q
<b>Amplifier requirements</b>	10-150 W
<b>Sensitivity</b>	90 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF200R
<b>Rear enclosure</b>	RNC200R
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø289.6 x D109.8 mm (11.4 x 4.33 in.) /piece
<b>Cut-out dimensions</b>	Ø240 mm (9.45 in.)
<b>Mounting depth from surface</b>	103.3 mm (4.07 in.)
<b>Product weight</b>	2.4 kg (5.28 lbs.) /piece

<b>LOGISTIC SPECIFICATION</b>	
<b>Packaging dimensions</b>	H145 x W353 x D353 mm (5.7 x 13.9 x 13.9 in.)/piece
<b>Gross weight</b>	3.2 kg (7.1 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3734AA
<b>UPC</b>	637203207488

## Ci160QR

Features KEF's patented Uni-Q driver array



MSRP  
€314/piece

PRODUCT SPECIFICATION	
<b>Drive Units</b>	HF: 19mm (0.75 in.) LF: 160mm (6.5 in.) Uni-Q
<b>Amplifier requirements</b>	10-125 W
<b>Sensitivity</b>	89 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF160R
<b>Rear enclosure</b>	RNC160R
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø234.6 x D98 mm (9.24 x 3.86 in.)/piece
<b>Cut-out dimensions</b>	Ø196 mm (7.71 in.)
<b>Mounting depth from surface</b>	91 mm (3.58 in.)
<b>Product weight</b>	2.05 kg (4.51 lbs.)/piece

LOGISTIC SPECIFICATION	
<b>Packaging dimensions</b>	H139 x W285 x D285 mm (5.5 x 11.2 x 11.2 in.)/piece
<b>Gross weight</b>	2.3 kg (5.1 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3733AA
<b>UPC</b>	637203207204

## Ci130QR

Features KEF's patented Uni-Q driver array



MSRP  
€261/piece

PRODUCT SPECIFICATION	
<b>Drive Units</b>	HF: 19 mm (0.75 in.) LF: 130 mm (5.25 in.) Uni-Q
<b>Amplifier requirements</b>	10-100 W
<b>Sensitivity</b>	87 dB (2.83V/1m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF130R
<b>Rear enclosure</b>	RNC130R
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø193.4 x D83mm (7.61 x 3.28 in.)/piece
<b>Cut-out dimensions</b>	158 mm (6.22 in.)
<b>Mounting depth from surface</b>	77.8 mm (3.06 in.)
<b>Product weight</b>	1.35 kg (2.97 lbs.)/piece

LOGISTIC SPECIFICATION	
<b>Packaging dimensions</b>	H137 x W259 x D258 mm (5.4 x 10.2 x 10.2 in.)/piece
<b>Gross weight</b>	1.8 kg (4 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3732AA
<b>UPC</b>	637203207464

## Ci130.2CS

Features KEF's patented Uni-Q driver array



MSRP  
€209/piece

PRODUCT SPECIFICATION	
<b>Drive Units</b>	HF: 16 mm (0.6 in.) LF: 130 mm (5.25 in.) Uni-Q
<b>Amplifier requirements</b>	10-80 W
<b>Sensitivity</b>	87 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF130S
<b>Rear enclosure</b>	RNC130S
<b>Certification</b>	IP64
<b>Dimensions</b>	H184 x W184 x D81 mm (7.24 x 7.24 x 3.19 in.)/piece
<b>Cut-out dimensions</b>	H158 x W158 mm (6.22 x 6.22 in.)
<b>Mounting depth from surface</b>	77.1 mm (3.03 in.)
<b>Product weight</b>	1.2 kg (2.7 lbs.)/piece

LOGISTIC SPECIFICATION	
<b>Packaging dimensions</b>	H139 x W275 x D255 mm (5.5 x 10.8 x 10 in.)/piece
<b>Gross weight</b>	1.6 kg (3.5 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3935AA
<b>UPC</b>	637203215445

## Ci200.2CR

Features KEF's patented Uni-Q driver array



MSRP  
€345/piece

PRODUCT SPECIFICATION	
<b>Drive Units</b>	HF: 16 mm (0.6 in.) LF: 200 mm (8 in.) Uni-Q
<b>Amplifier requirements</b>	10-125 W
<b>Sensitivity</b>	90 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF200R
<b>Rear enclosure</b>	RNC200R
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø289.6 mm x D103.3 mm (11.4 x 4.07 in.)/piece
<b>Cut-out dimensions</b>	Ø240 mm (9.45 in.)
<b>Mounting depth from surface</b>	97.2 mm (3.83 in.)
<b>Product weight</b>	1.7 kg (3.7 lbs.)/piece

LOGISTIC SPECIFICATION	
<b>Packaging dimensions</b>	H145x W353 xD353 mm (5.7x13.9x 13.9 in.)/piece
<b>Gross weight</b>	2.4 kg (5.3 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3936AA
<b>UPC</b>	637203215469

## Ci-C Series

### Ci160.2CL

Features KEF's patented Uni-Q driver array



MSRP  
€261/piece

PRODUCT SPECIFICATION	
<b>Drive Units</b>	HF: 16 mm (0.6 in.) LF: 160 mm (6.5 in.) Uni-Q
<b>Amplifier requirements</b>	10-100 W
<b>Sensitivity</b>	89 dB (2.83 V/ 1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF160L
<b>Rear enclosure</b>	RNC160L
<b>Certification</b>	IP64
<b>Dimensions</b>	H303 x W223 xD 88.7 mm (11.93 x 8.78 x 3.49 in.)/piece
<b>Cut-out dimensions</b>	H274 x W194 mm (10.79 x 7.64 in.)
<b>Mounting depth from surface</b>	84.5 mm (3.33 in.)
<b>Product weight</b>	1.6 kg (3.5 lbs.)/piece

LOGISTIC SPECIFICATION	
<b>Packaging dimensions</b>	H139 x W382 x D284 mm (5.5 x 15 x 11.2 in.)/piece
<b>Gross weight</b>	2.2 kg (4.9 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3933AA
<b>UPC</b>	637203215407

### Ci160.2CS

Features KEF's patented Uni-Q driver array



MSRP  
€240/piece

PRODUCT SPECIFICATION	
<b>Drive Units</b>	HF: 16mm (0.6 in.) LF: 160mm (6.5 in.) Uni-Q
<b>Amplifier requirements</b>	10-100 W
<b>Sensitivity</b>	89 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF160S
<b>Rear enclosure</b>	RNC160S
<b>Certification</b>	IP64
<b>Dimensions</b>	H223 x W223 x D88.7 mm (8.78 x 8.78 x 3.49 in.)/piece
<b>Cut-out dimensions</b>	H194 x W194mm (7.64 x 7.64 in.)
<b>Mounting depth from surface</b>	84.5 mm (3.33 in.)
<b>Product weight</b>	1.5 kg (3.3 lbs.)/piece

LOGISTIC SPECIFICATION	
<b>Packaging dimensions</b>	H139 x W302 x D284 mm (5.5 x 11.9 x 11.2 in.)/piece
<b>Gross weight</b>	2 kg (4.4 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3934AA
<b>UPC</b>	637203215421

### Ci160.2CR

Features KEF's patented Uni-Q driver array



MSRP  
€240/piece

PRODUCT SPECIFICATION	
<b>Drive Units</b>	HF: 16 mm (0.6 in.) LF: 130 mm (5.25 in.) Uni-Q
<b>Amplifier requirements</b>	10-100 W
<b>Sensitivity</b>	89 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF160R
<b>Rear enclosure</b>	RNC160R
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø234.6 mm x D88.7 mm (9.24 x 3.49 in.)/piece
<b>Cut-out dimensions</b>	Ø196 mm (7.71 in.)
<b>Mounting depth from surface</b>	84.5 mm (3.33 in.)
<b>Product weight</b>	1.4 kg (3.1 lbs.)/piece

LOGISTIC SPECIFICATION	
<b>Packaging dimensions</b>	H139 x W284 x D284 mm (5.5 x 11.2 x 11.2 in.)/piece
<b>Gross weight</b>	1.9 kg (4.2 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3937AA
<b>UPC</b>	637203215483

### Ci130.2CR

Features KEF's patented Uni-Q driver array



MSRP  
€209/piece

PRODUCT SPECIFICATION	
<b>Drive Units</b>	HF: 16 mm (0.6 in.) LF: 130 mm (5.25 in.) Uni-Q
<b>Amplifier requirements</b>	10-80 W
<b>Sensitivity</b>	87 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF130R
<b>Rear enclosure</b>	RNC130R
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø193.4 mm x D82.3 mm (7.61 x 3.24 in.)/piece
<b>Cut-out dimensions</b>	Ø158 mm (6.22 in.)
<b>Mounting depth from surface</b>	77.7 mm (3.06 in.)
<b>Product weight</b>	1.3 kg (2.8 lbs.)/piece

LOGISTIC SPECIFICATION	
<b>Packaging dimensions</b>	H137 x W255 x D255 mm (5.4 x 10 x 10 in.)/piece
<b>Gross weight</b>	1.8 kg (4 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3938AA
<b>UPC</b>	637203215506

## Ci-E Series

### Ci160ES

Unprecedented value and performance



MSRP  
€167/piece

#### PRODUCT SPECIFICATION

<b>Drive Units</b>	HF: 16 mm (0.6 in.) LF: 160 mm (6.5 in.) Uni-Q
<b>Amplifier requirements</b>	10-100 W
<b>Sensitivity</b>	89 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF160S
<b>Rear enclosure</b>	RNC160S
<b>Certification</b>	IP64
<b>Dimensions</b>	H223 x W223 x D88.7 mm (8.78 x 8.78 x 3.49 in./piece)
<b>Cut-out dimensions</b>	H194 x W194 mm (7.64 x 7.64 in.)
<b>Mounting depth from surface</b>	85.2 mm (3.35 in.)
<b>Product weight</b>	1.4 kg (3.1 lbs./piece)

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H286 x W281 x D276 mm (11.3 x 11.1 x 10.9 in.)/pair
<b>Gross weight</b>	3.6 kg (7.9 lbs.)/pair
<b>Warranty period</b>	5 years
<b>Item no</b>	SP4038AA
<b>UPC</b>	637203218149

### Ci200ER

Heard but not seen, with unprecedented value and performance.



MSRP  
€209/piece

#### PRODUCT SPECIFICATION

<b>Drive Units</b>	HF: 16 mm (0.6 in.) LF: 200 mm (8 in.) Uni-Q
<b>Amplifier requirements</b>	10-125 W
<b>Sensitivity</b>	90 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF200R
<b>Rear enclosure</b>	RNC200R
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø289.6 mm x D103.3 mm (11.4 x 4.07 in.)/piece
<b>Cut-out dimensions</b>	Ø240 mm (9.45 in.)
<b>Mounting depth from surface</b>	97.2 mm (3.83 in.)
<b>Product weight</b>	1.6 kg (3.6 lbs.)/piece

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H343 x W319 x D334 mm (13.5 x 12.6 x 13.1 in.)/pair
<b>Gross weight</b>	3.9 kg (8.6 lbs.)/pair
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3910AA
<b>UPC</b>	637203213472

### Ci160ER

Unprecedented value and performance



MSRP  
€167/piece

#### PRODUCT SPECIFICATION

<b>Drive Units</b>	HF: 16mm (0.6 in.) LF: 160mm (6.5 in.) Uni-Q
<b>Amplifier requirements</b>	10-100 W
<b>Sensitivity</b>	89 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF160R
<b>Rear enclosure</b>	RNC160R
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø234.6 x D88.7 mm (9.24 x 3.49 in.)/piece
<b>Cut-out dimensions</b>	Ø196 mm (7.71 in.)
<b>Mounting depth from surface</b>	85.2 mm (3.35 in.)
<b>Product weight</b>	1.4 kg (3.1 lbs.)/piece

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H286 x W281 x D276 mm (11.3 x 11.1 x 10.9 in.)/pair
<b>Gross weight</b>	3.3 kg (7.3 lbs.)/pair
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3909AA
<b>UPC</b>	637203213458

### Ci130ER

Unprecedented value and performance



MSRP  
€135/piece

#### PRODUCT SPECIFICATION

<b>Drive Units</b>	HF: 16 mm (0.6 in.) LF: 130 mm (5.25 in.) Uni-Q
<b>Amplifier requirements</b>	10-80 W
<b>Sensitivity</b>	90 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF130R
<b>Rear enclosure</b>	RNC130R
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø193.4 mm x D81 mm (7.61 x 3.19 in.)/piece
<b>Cut-out dimensions</b>	Ø158 mm (6.22 in.)
<b>Mounting depth from surface</b>	77.5 mm (3.05 in.)
<b>Product weight</b>	1.2 kg (2.7 lbs.)/piece

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H248 x W261 x D241 mm (9.8 x 10.3 x 9.5 in.)/pair
<b>Gross weight</b>	2.7 kg (6 lbs.)/pair
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3908AA
<b>UPC</b>	637203213434

## Special Applications



With a Flush Mount, an Extremely Low Profile, Dual Stereo and Soundlight speakers, KEF's architectural speakers are designed to cater to even the most specific needs, and a wide variety of installation setups. The discreet design only serves to enhance its extremely powerful performance.

#### Key Features

- Ultra-thin bezel design, magnetic paintable grille
- Weather resistant, IP64 certified
- Fast and easy to install
- KEF engineering approved build quality

## Soundlight

### Ci100QS

Soundlight speaker



MSRP  
€209/piece

#### PRODUCT SPECIFICATION

<b>Drive Units</b>	HF: 19mm (0.75 in.) LF: 100mm (4 in.) Uni-Q
<b>Amplifier requirements</b>	10-50 W
<b>Sensitivity</b>	88 dB (2.83 V/1 m)
<b>Impedance</b>	4 Ω
<b>Rough-in frame</b>	RIF100S
<b>Rear enclosure</b>	RNC100S
<b>Certification</b>	IP64
<b>Dimensions</b>	H127 x W127 x H76 mm (5.0 x 5.0 x 2.99 in.)/piece
<b>Cut-out dimensions</b>	H112 x W112 mm (4.41 x 4.41 in.)
<b>Mounting depth from surface</b>	72 mm (2.83 in.)
<b>Product weight</b>	0.67kg (1.48 lbs.)/piece

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H114 x W173 x D173 mm (4.5 x 6.8 x 6.8 in.)/piece
<b>Gross weight</b>	0.9 kg (2 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3768AA
<b>UPC</b>	637203208966

### Ci100.2QR

Soundlight speaker



MSRP  
€209/piece

#### PRODUCT SPECIFICATION

<b>Drive Units</b>	HF: 16 mm (0.6 in.) LF: 75 mm (3 in.) Uni-Q
<b>Amplifier requirements</b>	10-50 W
<b>Sensitivity</b>	83 dB (2.83 V/1 m)
<b>Impedance</b>	4 Ω
<b>Rough-in frame</b>	RIF100R
<b>Rear enclosure</b>	RNC100R
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø136 mm x D57 mm (5.4 x 2.2 in.)/piece
<b>Cut-out dimensions</b>	Ø118 mm (4.6 in.)
<b>Mounting depth from surface</b>	103 mm (4.1 in.)
<b>Product weight</b>	0.65 kg (1.44 lbs.)/piece

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H155 x W216 x D216 mm (6.1 x 8.5 x 8.5 in.)/piece
<b>Gross weight</b>	0.9 kg (2 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3928AA
<b>UPC</b>	637203215377



## Flush Mount

### Ci130QSfl

Flush Mount Speaker



MSRP  
€450/piece

#### PRODUCT SPECIFICATION

<b>Drive Units</b>	HF: 19mm (0.75 in.) LF: 130mm (5.25 in.) Uni-Q
<b>Amplifier requirements</b>	10-100 W
<b>Sensitivity</b>	87 dB (2.83 V/1m)
<b>Impedance</b>	8Ω
<b>Certification</b>	IP64
<b>Dimensions</b>	H200.5 x W200.5 x D103.6 mm (7.9 x 7.9 x 4.08 in.)/piece
<b>Cut-out dimensions</b>	H158 x W158 mm (6.22 x 6.22 in.)
<b>Mounting depth from surface</b>	101mm (3.98 in.)
<b>Product weight</b>	1.6 kg (3.53 lbs.)/piece

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H157 x W252 x D250 mm (6.2 x 9.9 x 9.8 in.)/piece
<b>Gross weight</b>	1.9 kg (4.2 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP4019AA
<b>UPC</b>	637203217647

### Ci130QRfl

Flush Mount Speaker



MSRP  
€450/piece

#### PRODUCT SPECIFICATION

<b>Drive Units</b>	HF: 19 mm (0.75 in.) LF: 130 mm (5.25 in.) Uni-Q
<b>Amplifier requirements</b>	10-100 W
<b>Sensitivity</b>	87 dB (2.83 V/1 m)
<b>Impedance</b>	8Ω
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø200.6 mm x D104.6 mm (7.9 x 4.12 in.)/piece
<b>Cut-out dimensions</b>	Ø158 mm (6.22 in.)
<b>Mounting depth from surface</b>	101mm (3.98 in.)
<b>Product weight</b>	1.45 kg (3.19 lbs.)/piece

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H157 x W252 x D250 mm (6.2 x 9.9 x 9.8 in.)/piece
<b>Gross weight</b>	1.8 kg (4 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP4012AA
<b>UPC</b>	637203217630

## Extremely Low Profile

### Ci160TS

Extremely Low Profile speaker



MSRP  
€345/piece

#### PRODUCT SPECIFICATION

<b>Drive Units</b>	HF: 25 mm (1 in.) LF: 115 mm (4.5 in.) Dual layer
<b>Amplifier requirements</b>	10-100W
<b>Sensitivity</b>	87 dB (2.83V/1m)
<b>Impedance</b>	8Ω
<b>Rough-in frame</b>	RIF160S
<b>Certification</b>	IP64
<b>Dimensions</b>	H222.8 x W222.8 x D41mm (8.77 x 8.77 x 1.61 in.)/piece
<b>Cut-out dimensions</b>	H194 x W194 mm (7.64 x 7.64 in.)
<b>Mounting depth from surface</b>	36mm (1.42 in.)
<b>Product weight</b>	1.05kg (2.31lbs)/piece

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H84 x W284 x D284 mm (3.3 x 11.2 x 11.2 in.)/piece
<b>Gross weight</b>	1.6 kg (3.5 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3884AA
<b>UPC</b>	637203212420

### Ci160TR

Extremely Low Profile speaker



MSRP  
€345/piece

#### PRODUCT SPECIFICATION

<b>Drive Units</b>	HF: 25mm (1 in.) aluminium HF LF: 115mm (4.5 in.) dual layer MF
<b>Amplifier requirements</b>	10-100W
<b>Sensitivity</b>	87dB (2.83V/1m)
<b>Impedance</b>	8Ω
<b>Rough-in frame</b>	RIF160R
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø234.6 mm x D40 mm (9.24 x 1.57 in.)/piece
<b>Cut-out dimensions</b>	Ø196mm (7.7 in.)
<b>Mounting depth from surface</b>	36mm (1.42 in.)
<b>Product weight</b>	1 kg (2.2 lbs.)/piece

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H77 x W283 x D283 mm (3 x 11.1 x 11.1 in.)/piece
<b>Gross weight</b>	1.5 kg (3.3 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3830AA
<b>UPC</b>	637203210983

## Dual Stereo

### Ci160CSds

Dual stereo speaker



MSRP  
€293/piece

#### PRODUCT SPECIFICATION

<b>Drive Units</b>	HF: 2 x 19mm (0.75 in.) LF: 160mm (6.5 in.) Dual voice coil
<b>Amplifier requirements</b>	10-80W
<b>Sensitivity</b>	91 dB (2.83V/1m)
<b>Impedance</b>	8Ω
<b>Rough-in frame</b>	RIF160S
<b>Rear enclosure</b>	RNC160S
<b>Certification</b>	IP64
<b>Dimensions</b>	H223 x W223 x D90.5mm (8.78 x 8.78 x 3.56 in.)/piece
<b>Cut-out dimensions</b>	H194 x W194 mm (7.64 x 7.64 in.)
<b>Mounting depth from surface</b>	84.5 mm (3.33 in.)
<b>Product weight</b>	1.8 kg (4 lbs.)/piece

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H139 x W302 x D284 mm (5.5 x 11.9 x 11.2 in.)/piece
<b>Gross weight</b>	2.3 kg (5.1 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3769AA
<b>UPC</b>	637203208768

### Ci160CRds

Dual stereo speaker



MSRP  
€293/piece

#### PRODUCT SPECIFICATION

<b>Drive Units</b>	HF: 2 x 19mm (0.75 in.) LF: 160mm (6.5 in.) Dual voice coil
<b>Amplifier requirements</b>	10-80W
<b>Sensitivity</b>	91 dB (2.83 V/1 m)
<b>Impedance</b>	8 Ω
<b>Rough-in frame</b>	RIF160R
<b>Rear enclosure</b>	RNC160R
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø234.6 mm x D93 mm (9.24 x 3.66 in.)/piece
<b>Cut-out dimensions</b>	Ø196 mm (7.71 in.)
<b>Mounting depth from surface</b>	86 mm (3.36 in.)
<b>Product weight</b>	1.80 kg (4.0 lbs.)/piece

#### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H139 x W285 x D284 mm (5.5 x 11.2 x 11.2 in.)/piece
<b>Gross weight</b>	2.2 kg (4.9 lbs.)/piece
<b>Warranty period</b>	5 years
<b>Item no</b>	SP3687AA
<b>UPC</b>	637203207181

# Installed subwoofers



KEF's installed subwoofers offer incredible sonic performance whilst remaining visually discreet, and they are all engineered to partner any of KEF's architectural speaker ranges. Plus, when powered by KEF's DSP-driven KASA500 install audio system amplifier, the Ci3160RLb-THX, Ci250RRb-THX and Ci200Qsb-THX subwoofers achieve the intense bass performance levels required for THX Certified Select and THX Certified Ultra (dependent on configuration).

## Ci3160RLb-THX

THX Certified Ultra in-wall subwoofer

THX CERTIFIED ULTRA  
THX CERTIFIED SELECT



<b>MSRP</b>	<b>€1,249/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Series</b>	Ci-R Series
<b>Drive units</b>	LF: 3 x 160 mm (6.5 in.)
<b>Amplifier requirements</b>	KEF KASA500 Units required for THX Ultra (Subwoofer   KASA500): 4   2 Units required for THX Select (Subwoofer   KASA500): 2   1
<b>Sensitivity</b>	92 dB (2.83 V/1 m)
<b>Impedance</b>	4 Ω
<b>Rough-in frame</b>	RIF3160L
<b>Certification</b>	THX Certified Ultra, THX Certified Select
<b>Dimensions</b>	H680 x W230 x D96 mm (26.77 x 9.06 x 3.78 in./piece)
<b>Cut-out dimensions</b>	H660 x W209 mm (26.38 x 8.23 in.)
<b>Mounting depth from surface</b>	88.5 mm (3.84 in.)
<b>Product weight</b>	10.9 kg (24.03 lbs./piece)

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H322 x W768 x D227 mm (14.25 x 30.24 x 8.94 in.)/piece
<b>Gross weight</b>	12.3 kg (27.12 lbs./piece)
<b>Warranty period</b>	5 years
<b>Item no.</b>	SP3835AA
<b>UPC</b>	637203211867

## Ci250RRb-THX

The extreme architectural subwoofer

THX CERTIFIED ULTRA  
THX CERTIFIED SELECT



<b>MSRP</b>	<b>€1,250/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Series</b>	Ci-R Series
<b>Drive units</b>	LF: 250 mm (10 in.)
<b>Amplifier requirements</b>	KEF KASA500 Units required for THX Ultra (Subwoofer   KASA500): 4   1 Units required for THX Select (Subwoofer   KASA500): 2   1
<b>Sensitivity</b>	109 dB (2.83 V/1 m)
<b>Impedance</b>	4 Ω
<b>Certification</b>	THX Certified Ultra, THX Certified Select IP64
<b>Dimensions</b>	Ø: 346 mm x D153 mm (13.62 x 6.0 in.)/piece
<b>Cut-out dimensions</b>	Ø: 300 mm (11.81 in.)
<b>Mounting depth from surface</b>	147 mm (5.8 in.)
<b>Product weight</b>	5.6 kg (12.3 lbs./piece)

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H422 x W420 x D247 mm (16.6 x 16.5 x 9.7 in.)/piece
<b>Gross weight</b>	6.4 kg (14.1 lbs./piece)
<b>Warranty period</b>	5 years
<b>Item no.</b>	SP4040AA
<b>UPC</b>	637203218408

## Ci200Qsb-THX

THX Certified Ultra 200mm subwoofer

THX CERTIFIED ULTRA  
THX CERTIFIED SELECT



<b>MSRP</b>	<b>€419/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Series</b>	Ci-Q Series
<b>Drive units</b>	LF: 200 mm (8 in.)
<b>Amplifier requirements</b>	KEF KASA500 Units required for THX Ultra (Subwoofer   KASA500): 4   2 Units required for THX Select (Subwoofer   KASA500): 2   1
<b>Sensitivity</b>	85 dB - Passive Mode (Crossover "ON")
<b>Impedance</b>	6 Ω
<b>Rough-in frame</b>	RIF200S
<b>Certification</b>	THX Certified Ultra, THX Certified Select IP64
<b>Dimensions</b>	H273 x W273 x D106 mm (10.75 x 10.75 x 4.17 in.)/piece
<b>Cut-out dimensions</b>	H238 x W238 mm (9.37 x 9.37 in.)
<b>Mounting depth from surface</b>	101.6 mm (4 in.)
<b>Product weight</b>	3.3 kg (7.28 lbs./piece)

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H369 x W363 x D340 mm (14.5 x 14.3 x 13.4 in.)/piece
<b>Gross weight</b>	7.6 kg (16.8 lbs./piece)
<b>Warranty period</b>	5 years
<b>Mode</b>	Passive mode      Active mode
<b>Item no.</b>	SP3894AA
<b>UPC</b>	637203212413

## Ci200TRb

The extreme architectural subwoofer



<b>MSRP</b>	<b>€524/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Series</b>	Ci-T Series
<b>Drive units</b>	LF: 200 mm (8 in.)
<b>Amplifier requirements</b>	KEF KASA500 Units required for THX Ultra (Subwoofer   KASA500): 4   1 Units required for THX Select (Subwoofer   KASA500): 2   1
<b>Sensitivity</b>	87 dB (2.83 V/1 m)
<b>Impedance</b>	4 Ω
<b>Rough-in frame</b>	RIF200R
<b>Certification</b>	IP64
<b>Dimensions</b>	Ø: 290 mm x D63 mm (11.42 x 2.48 in.)/piece
<b>Cut-out dimensions</b>	240 mm (9.45 in.)
<b>Mounting depth from surface</b>	26 mm (1.03 in.)
<b>Product weight</b>	1.7 kg (3.75 lbs./piece)

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H96 x W356 x D354 mm (3.8 x 14 x 13.9 in.)/piece
<b>Gross weight</b>	2.4 kg (5.3 lbs./piece)
<b>Warranty period</b>	5 years
<b>Mode</b>	Passive mode      Active mode
<b>Item no.</b>	SP3845AA
<b>UPC</b>	637203212406

## Accessories

### KASA500

powerful Class-D Dual 250WPC amplifier



<b>MSRP</b>	<b>€1,199/piece</b>
<b>PRODUCT SPECIFICATION</b>	
<b>Inputs</b>	Selectable stereo RCA line level, or mono LFE RCA level; Stereo speaker level
<b>Outputs</b>	2 x 250 W 4 Ω Bridge 1 x 500 W 8 Ω (<1% THD)
<b>Dimensions</b>	H88 x W432 x D304 mm (3.5 x 17 x 12 in.)/piece
<b>Product weight</b>	4 kg (9 lbs./piece)

### LOGISTIC SPECIFICATION

<b>Packaging dimensions</b>	H198 x W496 x D390 mm (7.8 x 19.5 x 15.4 in.)/piece
<b>Gross weight</b>	5.3 kg (11.7 lbs./piece)
<b>Warranty period</b>	5 years
<b>Item no.</b>	SP3838BB
<b>UPC</b>	637203211133

# Outdoor



On the patio, by the pool, or on a yacht, the KEF Ventura Series outdoor speakers let you enjoy music without compromise. Engineered to IP65 standards, these rugged, hard-wearing speakers can withstand even the most extreme weather conditions.

- Key Features**
- All metal design, powder coated to extremes to last and last
  - High-quality sound that meets KEF engineering expectations
  - Weather resistant, IP65 certified, salt spray tested for over 1200 hours
  - All mounting hardware is included
  - Rugged, hard-wearing speakers can withstand even most extreme weather


## Ventura 6 Outdoor Speakers



MSRP  
**€288/piece**

**PRODUCT SPECIFICATION**

<b>Drive units</b>	HF: 25 mm (1 in.) LF: 160 mm (6.5 in.)
<b>Amplifier requirements</b>	10-125 W
<b>Sensitivity</b>	90 dB (2.83 V/1 m)
<b>Impedance</b>	6 Ω
<b>Operating temperature range</b>	-40° C to 70° C (-40° F to 158° F)
<b>Certification</b>	IP65
<b>Dimensions</b>	H300 x W226 x D219 mm (11.8 x 9 x 8.6 in.)/piece
<b>Product weight</b>	3.8 kg (8.4 lbs.)/piece



**LOGISTIC SPECIFICATION**

<b>Packaging dimensions</b>	H357 x W596 x D288 mm (14.1 x 23.5 x 11.3 in.)/piece	
<b>Gross weight</b>	8 kg (17.6 lbs.)/piece	
<b>Warranty period</b>	5 years	
<b>Finishes</b>	a. Black	b. White
<b>Item no.</b>	SP3676BA	SP3676AA
<b>UPC</b>	637203043109	637203028809

## Ventura 5 Outdoor Speakers



MSRP  
**€236/piece**

**PRODUCT SPECIFICATION**

<b>Drive units</b>	HF: 25 mm (1 in.) LF: 130 mm (5.25 in.)
<b>Amplifier requirements</b>	10-100 W
<b>Sensitivity</b>	89 dB (2.83 V/1 m)
<b>Impedance</b>	6 Ω
<b>Operating temperature range</b>	-40° C to 70° C (-40° F to 158° F)
<b>Certification</b>	IP65
<b>Dimensions</b>	H262 x W197 x D189 mm (10.3 x 7.75 x 7.4 in.)/piece
<b>Product weight</b>	2.85 kg (6.28 lbs.)/piece



**LOGISTIC SPECIFICATION**

<b>Packaging dimensions</b>	H330 x W541 x D257 mm (13 x 21.3 x 10.1 in.)/piece	
<b>Gross weight</b>	6.3 kg (13.9 lbs.)/piece	
<b>Warranty period</b>	5 years	
<b>Finishes</b>	a. Black	b. White
<b>Item no.</b>	SP3675BA	SP3675AA
<b>UPC</b>	637203031090	637203028793

# Accessories

## Steel Rough-in Frames

For in-wall and in-ceiling speakers



MSRP

RIF100R	€20/piece
RIF130S	€20/piece
RIF130R	€20/piece
RIF160L	€20/piece
RIF160S	€20/piece
RIF160R	€20/piece
RIF200L	€20/piece
RIF200S	€20/piece
RIF200R	€20/piece
RIF4100L	€59/piece
RIF3160L	€89/piece
RIF5160L	€179/piece

**PRODUCT SPECIFICATION**

<b>Dimensions</b>	RIF100S & RIF100R	H149 x W590 mm (5.9 x 23.2 in.)/piece
	RIF130S & RIF130R	H187 x W590 mm (7.4 x 23.2 in.)/piece
	RIF130S & RIF130R	H187 x W590 mm (7.4 x 23.2 in.)/piece
	RIF160L	H320 x W590 mm (13 x 23.2 in.)/piece
	RIF160S & RIF160R	H240 x W590 mm (9.5 x 23.2 in.)/piece
	RIF200L	H386 x W590 mm (15.2 x 23.2 in.)/piece
	RIF200S & RIF200R	H280 x W590 mm (11 x 23.2 in.)/piece
	RIF4100L	H530 x W571 mm (20.9 x 22.5 in.)/piece
	RIF3160L	H712 x W590 mm (28 x 23.2 in.)/piece
	RIF5160L	H1102 x W590 mm (43.4 x 23.2 in.)/piece

## Steel Rough-in Frames

For in-wall and in-ceiling speakers



MSRP

RNC100R	€90/piece
RNC130R	€90/piece
RNC160R	€120/piece
RNC200R	€130/piece
RNC130S	€90/piece
RNC160S	€120/piece
RNC200S	€130/piece
RNC100S	€90/piece
RNC200L	€130/piece
RNC160L	€120/piece

**PRODUCT SPECIFICATION**

<b>Dimensions</b>	RNC100R	H590 x W390 x D95 mm (23.2 x 15.4 x 3.7 in.)/piece
	RNC130R	H590 x W390 x D95 mm (23.2 x 15.4 x 3.7 in.)/piece
	RNC160R	H590 x W650 x D100 mm (23.2 x 26 x 3.9 in.)/piece
	RNC200R	H590 x W650 x D100 mm (23.2 x 26 x 3.9 in.)/piece
	RNC130S	H590 x W390 x D95 mm (23.2 x 15.4 x 3.7 in.)/piece
	RNC160S	H590 x W650 x D100 mm (23.2 x 26 x 3.9 in.)/piece
	RNC200S	H590 x W650 x D100 mm (23.2 x 26 x 3.9 in.)/piece
	RNC100S	H590 x W390 x D95 mm (23.2 x 15.4 x 3.7 in.)/piece
	RNC200L	H590 x W650 x D100 mm (23.2 x 26 x 3.9 in.)/piece
	RNC160L	H590 x W650 x D100 mm (23.2 x 26 x 3.9 in.)/piece



# Listen and believe

Explore more



**GP Acoustics (UK) Ltd**

Address: Eccleston Road, Tovil, Maidstone, Kent, ME15 6QP

Telephone: +44(0)1622 672261

Email: [sales.uk@kef.com](mailto:sales.uk@kef.com)

Online: [uk.kef.com](http://uk.kef.com)

NB Some of the information in this price list may not have been updated due to product changes which may have occurred since it was printed/published. The manufacturer reserves the right to make changes at any time, without notice, to prices, colour, materials, specifications and models.